

# Interpretation®

**A direct inverse method for subsurface properties: the conceptual and practical benefit and added-value in comparison with all current indirect methods, for example, AVO and FWI**

Journal:	<i>Interpretation</i>
Manuscript ID	INT-2016-0198.R1
Manuscript Type:	Tools, Techniques, and Tutorials
Date Submitted by the Author:	n/a
Complete List of Authors:	Weglein, Arthur; University of Houston, Physics;
Keywords:	algorithm, AVO/AVA, full-waveform inversion, inversion, multiples
Subject Areas:	Tutorials/pitfalls and lessons learned

SCHOLARONE™  
Manuscripts

view

1  
2  
3  
4 **A direct inverse method for subsurface properties: the**  
5  
6  
7 **conceptual and practical benefit and added-value in**  
8  
9  
10 **comparison with all current indirect methods, for example,**

11  
12  
13  
14 **AVO and FWI**

15  
16  
17 **Arthur B. Weglein\***

18  
19 *\*M-OSRP/Physics Department*

20  
21 *University of Houston*

22  
23 *Houston TX 77004, USA*

24  
25  
26 (February 22, 2017)

27  
28 **INT-2016-0198**

29  
30  
31 Running head: **A direct inverse solution**

32  
33  
34  
35 **ABSTRACT**

36  
37  
38 We begin by (1) providing an overview that defines modeling and direct and indirect in-  
39 version, (2) describing the inverse scattering series (ISS), the only direct inversion method  
40 for a multidimensional subsurface; (3) showing how every term in the ISS (and hence every  
41 seismic processing objective) can be computed and achieved directly and without subsurface  
42 information. We then focus on the seismic processing task of parameter identification and  
43 provide the direct inverse solution for elastic isotropic mechanical properties. Among the  
44 key objectives of this paper is to clearly demonstrate, using a very simple and transpar-  
45 ent example, precisely why solving a forward problem in an inverse sense is not equivalent  
46 to solving an inverse problem directly. Solving a forward problem in an inverse sense is  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60

1  
2  
3  
4 an indirect inverse method. We show that AVO and FWI are solving a forward problem  
5  
6 in an inverse sense and hence are indirect inverse methods. Model matching primaries or  
7  
8 model matching primaries and multiples are both indirect inversion methods. We provide  
9  
10 an analytic example and explicit step by step comparison between a direct inverse solution  
11  
12 (from the ISS) for parameter estimation and the indirect linear model matching concepts  
13  
14 behind, for example, AVO and FWI. Two key and unique advantages of direct inversion,  
15  
16 for processing and interpretation, are being able to: (1) know you have actually solved the  
17  
18 problem of interest, and, equally if not more important (2) distinguish between a problem  
19  
20 of interest and the problem that we need to be interested in solving. We provide a view  
21  
22 of the proper roles of direct and indirect inversion within a comprehensive and effective  
23  
24 seismic processing and interpretation strategy.  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60

## INTRODUCTION

Seismic processing is an inverse problem to determine the properties of a medium from measurements of a wavefield exterior to the medium. The ultimate inversion objective of seismic processing in seismic exploration is to use recorded reflection data to extract useful subsurface information that is relevant to the location and production of hydrocarbons. There is typically a coupled chain of intermediate steps and processing that takes place towards that objective, and we refer to each of those intermediate steps, stages and tasks as objectives “associated with inversion” or inverse tasks towards the ultimate subsurface information extraction goal and objective. All seismic processing methods used to extract subsurface information make assumptions and have prerequisites .

A seismic method will be effective when those assumptions/conditions/requirements are satisfied. When those assumptions are not satisfied the method can have difficulty and/or will fail. That failure can and will contribute to processing and interpretation difficulties with subsequent dry-hole exploration well drilling or drilling suboptimal appraisal and development wells.

Challenges in seismic processing and seismic exploration and production derive from the violation of assumptions/requirements behind seismic processing methods. Advances in seismic processing effectiveness are measured in terms of whether the new capability results in/contributes to more successful plays and better-informed decisions and an increased rate of successful drilling .

The purpose of seismic research is to identify and address seismic challenges and to thereby add more effective options to the seismic processing toolbox. These new options can be called upon when indicated, appropriate and necessary as circumstances dictate.

1  
2  
3  
4 No tool box option is the appropriate choice under all circumstances. For example,  
5  
6 the most effective method, from a technical perspective, might be more than is necessary  
7  
8 and needed, under a given circumstance, and a less effective and often less costly option  
9  
10 could be the appropriate and indicated choice. Under other more complex and daunting  
11  
12 circumstances, the more effective and (perhaps) more costly option will be the only possible  
13  
14 choice that's able to achieve the objective of that processing task and interpretation goal.  
15  
16 The objective is to expand the number of options in the seismic toolbox to allow a capable  
17  
18 response to a larger number of circumstances. As we will point out below, "identify the  
19  
20 problem" is the first, the essential and sometimes the most difficult (and often ignored  
21  
22 and/or underappreciated) aspect of seismic research.  
23  
24  
25  
26  
27

28 Identifying and delineating the violation of assumptions behind seismic processing meth-  
29  
30 ods is an absolutely essential first step in a strategy and plan for developing a response to  
31  
32 prioritizing and pressing seismic exploration challenges. This paper provides a new insight,  
33  
34 and advance for the first and critical step of addressing seismic processing challenges:  
35  
36 problem identification.  
37  
38  
39

40 We explain in detail and exemplify why only a direct inversion method can help us  
41  
42 decide whether the problem we are interested in addressing is, in fact, the problem we need  
43  
44 to address.  
45  
46  
47

48 Seismic processing methods can be classified as based on either statistical models and  
49  
50 principles or wave theory concepts and approaches. Wave theory concepts used in seismic  
51  
52 processing can be further catalogued as modeling and inversion.  
53  
54

55 In the next section, we describe these two wave theory approaches to seismic processing,  
56  
57 that is, modeling and inversion, and will further distinguish between direct and indirect  
58  
59  
60

1  
2  
3  
4 inversion methods. That clarification represents a central theme and objective of this paper.  
5  
6  
7

## 8 9 MODELING AND INVERSION

10  
11 Modeling, as a seismic processing tool, starts with a prescribed wavefield source mechanism  
12 and a model type (e.g., acoustic, elastic, anisotropic, anelastic, . . .) and then properties are  
13 defined within the model type for a given medium (e.g., velocities, density, attenuation  $Q$ ,  
14 . . .). The modeling procedure then provides the seismic wave field that the energy source  
15 produces at all points inside and outside the medium.  
16  
17  
18  
19  
20  
21  
22

23  
24 Inversion also starts with an assumed known and prescribed energy source outside the  
25 medium. In addition, the wavefield outside the medium is assumed to be recorded and  
26 known. The objective of seismic inversion is to use the latter source description and wavefield  
27 measurement information to make inferences about the subsurface medium that are relevant  
28 to the location and production of hydrocarbons.  
29  
30  
31  
32  
33  
34  
35  
36  
37

## 38 DIRECT AND INDIRECT INVERSION

39  
40 Inversion methods can be classified as direct or indirect. A direct inversion method solves  
41 an inverse problem (as its name suggests) directly. On the other hand, an indirect inversion  
42 method seeks to solve an inverse problem circuitously through indirect approaches that  
43 often call up assumed aligned objectives or conditions. There are times when the indi-  
44 rect approach will seek to satisfy necessary (but typically not sufficient) conditions, and  
45 properties, and is often mistakenly considered and treated as though it was equivalent to a  
46 direct method and solution. Indirect methods come in many varieties, some are obvious and  
47 others are more subtle and harder to identify as indirect. Among indicators, identifiers and  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60

1  
2  
3  
4 examples of “indirect” inverse solutions (Weglein, 2015a) are: (1) model matching, (2) ob-  
5  
6 jective/cost functions, (3) local and global search algorithms, (4) iterative linear inversion,  
7  
8  
9 (5) methods corresponding to necessary but not sufficient conditions, e.g., common image  
10  
11 gather flatness as an indirect migration velocity analysis method and (6) solving a forward  
12  
13 problem in an inverse sense, e.g., AVO and FWI. Regarding the last indirect indicator, item  
14  
15 (6), we will show that solving a forward problem in an inverse sense is not equivalent to a  
16  
17 direct inverse solution for those same objectives.  
18  
19

20  
21 As a simple illustration, a quadratic equation

$$22 \quad ax^2 + bx + c = 0 \quad (1)$$

23  
24  
25  
26  
27  
28 can be solved through a direct method as

$$29 \quad x = \frac{-b \pm \sqrt{b^2 - 4ac}}{2a}, \quad (2)$$

30  
31  
32  
33  
34 or it can be solved by an indirect method searching for  $x$  such that, e.g., some functional of

$$35 \quad (ax^2 + bx + c)^2 \quad (3)$$

36  
37  
38  
39  
40  
41 is a minimum.  
42

43  
44 In the next section, this example will be further discussed and examined as a way to  
45  
46 introduce and develop fundamental concepts in a simple and transparent context. The  
47  
48 lesson gleaned from that simple example will later (in this paper) be extended and applied  
49  
50 to the more complicated and relevant seismic inverse formulations and methods. In Weglein  
51  
52 (2013) there is an introduction to the subject of direct and indirect inverse solutions, that  
53  
54 provides a useful background reference for this paper.  
55  
56  
57  
58  
59  
60

## THE IMPORTANT QUADRATIC EQUATION EXAMPLE

The direct quadratic formula solution equation (2) explicitly and directly outputs the exact roots, (for all values of  $a$ ,  $b$  and  $c$ ) when the roots are real and distinct, a real double root, and imaginary and complex roots. The quadratic equation and quadratic solution provides a very simple and insightful example. How would a search algorithm know after a double root is found that it is the only root and to not keep looking and searching forever for a second nonexistent root? How would a search algorithm know to search for only real or for real and complex roots? How would a search algorithm accurately locate an irrational root like  $\sqrt{3} \cong 1.732\dots$  as  $x = \frac{-b \pm \sqrt{b^2 - 4ac}}{2a}$  would directly and precisely and immediately produce? Indirect methods like model matching and seeking and searching and determining roots as in equation (3) are ad hoc, and do not derive from a firm framework and foundation and never provide the confidence that we are actually solving the problem of interest.

## WHAT'S THE POINT IN DISCUSSING THE QUADRATIC FORMULA? AND WHAT'S THE PRACTICAL BIG DEAL ABOUT A DIRECT SOLUTION?

How can this example and discussion of the quadratic equation possibly be relevant to exploration seismology? Please imagine for a moment that equation (1)  $ax^2 + bx + c = 0$  was an equation whose inverse and solution for  $x$  given by equation (2)  $x = \frac{-b \pm \sqrt{b^2 - 4ac}}{2a}$  had seismic exploration drill location prediction consequence. And furthermore suppose that this direct solution for  $x$  did not lead to successful and/or improved drilling decisions. Under the latter circumstance, we could not blame or question the method of solution of equation (1), since equation (2) is direct and unquestionably solving equation (1). If

1  
2  
3  
4 equation (2) was not producing useful and beneficial results we know that our starting  
5  
6 equation (1) is the issue, and we have identified the problem. The problem we thought  
7  
8 we need to solve, equation (1), is not the problem we need to solve. In contrast, with  
9  
10 equation (3), an indirect method, any lack of drilling prediction improvement and added-  
11  
12 value or other negative exploration consequences could be due to either the equation you  
13  
14 are seeking to invert and/or the boundless, unlimited selection, and plethora of indirect  
15  
16 methods using either partial or full recorded wavefields.  
17  
18  
19

20  
21 That lack of clarity and definitiveness within indirect methods obfuscates the underly-  
22  
23 ing issue and makes identification of the problem (and what's behind a seismic challenge)  
24  
25 considerably more difficult to identify and to define. Indirect methods with search engines  
26  
27 such as equation (3), lead to “workshops” for solving equation (1) and grasping at mega  
28  
29 HPC (High Performance Computing) straws (and capital expenditure investment for build-  
30  
31 ings full of HPC) that are required to search, seek and locate “solutions”. The more HPC  
32  
33 we invest in, and is required, the more we are literally “buying-in,” and as stake-holders  
34  
35 we become committed and therefore convinced of the unquestioned validity of the starting  
36  
37 point and our indirect thinking and methodology.  
38  
39  
40  
41

42  
43 Therefore, beyond the benefit of a direct method like equation (2) providing assurance  
44  
45 that we are actually solving the problem of interest, equation (1), there is the unique problem  
46  
47 location and identification benefit of a direct inverse when a seismic analysis, processing and  
48  
49 interpretation produces unsatisfactory E&P results.  
50  
51

52  
53 To bring this (quadratic equation example) closer to seismic experience, please imagine  
54  
55 hypothetically, that we are not satisfied (in terms of improved drill location and success  
56  
57 rate) with a direct inverse of the elastic isotropic equation for amplitude analysis. Since we  
58  
59  
60

1  
2  
3  
4 were employing a direct inversion solution, we know we need to go to a different starting  
5  
6 point, perhaps with a more complete and realistic model of wave propagation , since we can  
7  
8 exclude the direct inverse solution method as the problem and issue. That's an example of  
9  
10 determining that a problem of interest is not the same problem we need to be interested in.  
11  
12  
13  
14

15  
16 **HOW TO DISTINGUISH BETWEEN THE “PROBLEM OF**  
17  
18 **INTEREST” AND THE PROBLEM WE NEED TO BE INTERESTED**  
19  
20 **IN**  
21  
22

23  
24 Direct inverse methods provide value for knowing that you have actually solved the problem  
25  
26 of interest. Furthermore, with direct inverse solutions there is the enormous additional value  
27  
28 of determining whether our starting point, the “problem of interest”, is in fact the problem  
29  
30 we need to be interested in.  
31  
32  
33

34  
35 **SCATTERING THEORY AND THE FORWARD AND INVERSE**  
36  
37 **SCATTERING SERIES: THE BASIS OF DIRECT INVERSION**  
38  
39 **THEORY AND ALGORITHMS**  
40  
41  
42

43  
44 Scattering theory is a form of perturbation theory. It provides a direct inversion method  
45  
46 for all seismic processing objectives realized by distinct isolated task subseries of the inverse  
47  
48 scattering series (ISS) (Weglein et al., 2003). Each term in the inverse scattering series  
49  
50 (and the distinct and specific collection of terms that achieve different specific inversion  
51  
52 associated tasks) is computable (1) directly and (2) in terms of recorded reflection data and  
53  
54 without any subsurface information known, estimated or determined before, during or after  
55  
56 the task is performed and the specific processing objective is achieved.  
57  
58  
59  
60

1  
2  
3  
4 For certain distinct tasks, and subseries, e.g. free-surface multiple elimination and inter-  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60

For certain distinct tasks, and subseries, e.g. free-surface multiple elimination and internal multiple attenuation, the algorithms not only do not require subsurface information but in addition possess the absolutely remarkable property of being independent of earth model type (Weglein et al., 2003). That is, the distinct ISS free-surface and internal multiple algorithms are unchanged, without a single line of code having the slightest change for acoustic, elastic, anisotropic and anelastic earth models (Weglein et al., 2003; Wu and Weglein, 2014). For those who subscribe to indirect inversion methods as, e.g., the “be all and end all” of inversion with various model matching approaches, it would be a useful exercise for them to consider how they would formulate a model-type-independent model-matching scheme for free-surface and internal multiple removal. It is not conceivable, let alone realizable, to have a model-type-independent model matching.

For the specific topic and focus of this paper, the inversion task of parameter estimation, there is an obvious need to specify model type and what parameters are to be determined. Hence, it is for that parameter estimation/medium property objective, and that model-type-specific ISS subseries, that the difference between “the problem of interest” and the problem that we need to be interested in, is both relevant, central and significant. Only direct inversion methods for earth mechanical properties provide that assumed earth model-type evaluation, clarity and distinction.

## THE BASIC OPERATOR IDENTITY THAT RELATES A CHANGE IN A MEDIUM AND THE CHANGE IN THE WAVEFIELD

A direct inverse solution for parameter estimation can be derived from an operator identity that relates the change in a medium’s properties and the commensurate change in the

1  
2  
3  
4 wavefield. That operator identity is general and can accommodate any seismic model type,  
5  
6 for example, acoustic, elastic, anisotropic, heterogeneous, and inelastic earth models. That  
7  
8 operator identity can be the starting point and basis of both: (1) perturbative scattering-  
9  
10 theory modeling methods and (2) a firm and solid math-physics foundation and framework  
11  
12 for direct inverse methods.  
13  
14  
15  
16  
17

## 18 THEORY

19  
20  
21 Let's consider an energy source that generates a wave in a medium with prescribed proper-  
22  
23 ties. With the same energy source, let's consider a change in the medium and the resulting  
24  
25 change in the wavefield inside and outside the medium. Scattering theory is a form of per-  
26  
27 turbation theory that relates a change (or perturbation) in a medium to a corresponding  
28  
29 change (or perturbation) in the original wavefield. When the medium changes the result-  
30  
31 ing wavefield changes. The direct inverse solution (Weglein et al., 2003; Zhang, 2006) for  
32  
33 determining earth mechanical properties is derived from the operator identity that relates  
34  
35 the change in a medium's properties and the commensurate change in the wavefield both  
36  
37 within and exterior to the medium. Let  $L_0$ ,  $L$ ,  $G_0$ , and  $G$  be the differential operators and  
38  
39 Green's functions for the reference and actual media, respectively, that satisfy:  
40  
41  
42  
43  
44

$$45 L_0 G_0 = \delta \quad \text{and} \quad 46 LG = \delta,$$

47  
48 where  $\delta$  is a Dirac delta function. We define the perturbation operator,  $V$ , and the scattered  
49  
50 wavefield,  $\psi_s$ , as follows:  
51  
52  
53

$$54 V \equiv L_0 - L \quad \text{and} \quad 55 \psi_s \equiv G - G_0.$$

## The operator identity

The relationship (called the Lippmann-Schwinger or scattering theory equation)

$$G = G_0 + G_0VG \quad (4)$$

is an operator identity that follows from

$$L^{-1} = L_0^{-1} + L_0^{-1}(L_0 - L)L^{-1},$$

and the definitions of  $L_0$ ,  $L$ , and  $V$ .

## Direct forward series and direct inverse series

The operator identity equation (4) [for a fixed source function] is the exact relationship between changes in a medium and changes in the wavefield; it is a relationship between those quantities and not a solution. However the operator identity equation (4) can be solved for  $G$  as

$$G = (1 - G_0V)^{-1}G_0, \quad (5)$$

and expanded as

$$G = G_0 + G_0VG_0 + G_0VG_0VG_0 + \dots \quad (6)$$

The forward modeling of the wavefield,  $G$ , from equation (6) for a medium described by  $L$  is given in terms of the two parts of  $L$ , that is,  $L_0$  and  $V$ .  $L_0$  enters through  $G_0$  and  $V$  enters as  $V$  itself. Equation (6) communicates that modeling using scattering theory requires a complete and detailed knowledge of the earth model type and medium properties within the model type. Equation (6) communicates that any change in medium properties,  $V$ , will

lead to a change in the wavefield,  $G - G_0$ , that is always non-linearly related to the medium property change,  $V$ . Equation (6) is called the Born or Neumann series in scattering theory literature (see, e.g., Taylor, 1972). Equation (6) has the form of a generalized geometric series

$$G - G_0 = S = ar + ar^2 + \dots = \frac{ar}{1 - r} \text{ for } |r| < 1, \quad (7)$$

where we identify  $a = G_0$  and  $r = VG_0$  in equation (6), and

$$S = S_1 + S_2 + S_3 + \dots, \quad (8)$$

where the portion of  $S$  that is linear, quadratic, ... in  $r$  is:

$$S_1 = ar,$$

$$S_2 = ar^2,$$

$$\vdots$$

and the sum is

$$S = \frac{ar}{1 - r}, \text{ for } |r| < 1. \quad (9)$$

Solving equation (9) for  $r$ , in terms of  $S/a$  produces the inverse geometric series,

$$\begin{aligned} r &= \frac{S/a}{1 + S/a} = S/a - (S/a)^2 + (S/a)^3 + \dots \\ &= r_1 + r_2 + r_3 + \dots, \text{ when } |S/a| < 1, \end{aligned} \quad (10)$$

where  $r_n$  is the portion of  $r$  that is  $n$ th order in  $S/a$ . When  $S$  is a geometric power series in  $r$ , then  $r$  is a geometric power series in  $S$ . The former is the forward series and the latter is the inverse series. That is exactly what the inverse series represents, the inverse geometric series of the forward series equation (6). This is the simplest prototype of an inverse series for  $r$ , i.e., the inverse of the forward geometric series for  $S$ .

For the seismic inverse problem, we associate  $S$  with the measured data (see e.g. Weglein et al., 2003)

$$S = (G - G_0)_{ms} = \text{Data},$$

and the forward and inverse series follow from treating the forward solution as  $S$  in terms of  $V$ , and the inverse solution as  $V$  in terms of  $S$  (where  $S$  corresponds to the measured values of  $G - G_0$ ). The inverse series is the analog of equation (10) where  $r_1, r_2, \dots$  are simply replaced with  $V_1, V_2, \dots$ .

$$V = V_1 + V_2 + V_3 + \dots, \quad (11)$$

where  $V_n$  is the portion of  $V$  that is  $n$ th order in measured data,  $D$ . Equation (6) is the forward scattering series; and equation (11) is the inverse scattering series. The identity [equation (4)] provides a generalized geometric forward series, a very special case of a Taylor series. A Taylor series of a function,  $S(r)$ ,

$$S(r) = S(0) + S'(0)r + \frac{S''(0)r^2}{2} + \dots$$

and  $s(r) = S(r) - S(0) = S'(0)r + \frac{S''(0)r^2}{2} + \dots$  (12)

whereas the geometric series is

$$S(r) - \underbrace{S(0)}_a = ar + ar^2 + \dots. \quad (13)$$

The Taylor series equation (12) reduces to the special case of a geometric series equation (13) if

$$S(0) = S'(0) = \frac{S''(0)}{2} = \dots = a.$$

The geometric series equation (13) has an inverse series whereas the Taylor series equation (12) does not. In general, a Taylor series doesn't have an inverse series. That's the

1  
2  
3  
4 reason that inversionists committed to a Taylor series starting point adopt the indirect linear  
5  
6 updating approach, where a linear approximate Taylor series is inverted. They attempt  
7  
8 through updating to make the linear form an ever more accurate approximate — and its  
9  
10 premise and justification is entirely indirect and hence ad hoc — in the sense that some  
11  
12 sort of iterative linear updating of a reference medium and model matching seek to satisfy  
13  
14 a property that a solution might “reasonably” satisfy.  
15  
16

17  
18  
19 The relationship (6) provides a geometric forward series that honors equation (4) in  
20  
21 contrast to a truncated Taylor series that doesn’t.  
22  
23

24 All conventional current mainstream parameter estimation inversion, including iterative  
25  
26 linear inversion, AVO and FWI, are based on a forward Taylor series description of a given  
27  
28 data (where the chosen data can often be fundamentally and intrinsically inadequate from  
29  
30 a direct inversion perspective), that doesn’t honor and remain consistent with the identity  
31  
32 equation (6).  
33  
34  
35  
36  
37

### 38 **SOLVING A FORWARD PROBLEM IN AN INVERSE SENSE IS NOT** 39 40 **THE SAME AS SOLVING AN INVERSE PROBLEM DIRECTLY** 41 42

43 We will show that in general solving a forward problem in an inverse sense is not the same  
44  
45 as solving an inverse problem directly. The exception is when the exact direct inverse is  
46  
47 linear, as e.g. in the theory of wave equation migration (see, e.g. Claerbout, 1971; Stolt,  
48  
49 1978; Stolt and Weglein, 2012; Weglein et al., 2016). For wave equation migration, given  
50  
51 a velocity model the migration and structure map output is a linear function of the input  
52  
53 recorded reflection data.  
54  
55  
56  
57

58 To explain the latter statement, if we assume  $S = ar$  (that is, that there is an exact  
59  
60

linear forward relationship between  $S$  and  $r$ ) then  $r = S/a$  is solving the inverse problem directly. In that case, solving the forward problem in an inverse sense is the same as solving the inverse problem directly, that is, it provides a direct inverse solution.

However, if the forward exact relationship is non-linear, for example

$$S_n = ar + ar^2 + \dots + ar^n$$

$$S_n - ar - ar^2 - \dots - ar^n = 0 \quad (14)$$

and solving the forward problem (14) in an inverse sense for  $r$  will have  $n$  roots,  $r_1, r_2, \dots, r_n$ .

As  $n \rightarrow \infty$ , the number of roots  $\rightarrow \infty$ . However, from the direct nonlinear forward problem  $S = \frac{ar}{1-r}$ , we found the direct inverse solution  $r = \frac{S}{a+S}$  has one real root.

This discussion above provides an extremely simple, transparent and compelling illustration of how solving a forward problem in an inverse sense is not the same as solving the inverse problem directly when there is a non-linear forward and non-linear inverse problem. The difference between solving a forward problem in an inverse sense (for example using equation (6) to solve for  $V$ ) and solving an inverse problem directly (for example, equations (15)-(17)) is much more serious, substantive and practically significant the further we move away from a scalar single component acoustic framework. For example, it is hard to overstate the differences when examining the direct and indirect inversion of the elastic heterogeneous wave equation for earth mechanical properties, and the consequences for structural and amplitude analysis and interpretation. This is a central flaw in many inverse approaches, including AVO and FWI (please see Weglein, 2013).

The expansion of  $V$  in equation (11), in terms of  $G_0$  and  $D = (G - G_0)_{ms}$ , the inverse

scattering series (Weglein et al., 2003) can be obtained as

$$G_0 V_1 G_0 = D, \quad (15)$$

$$G_0 V_2 G_0 = -G_0 V_1 G_0 V_1 G_0, \quad (16)$$

$$G_0 V_3 G_0 = -G_0 V_1 G_0 V_1 G_0 V_1 G_0 \\ - G_0 V_1 G_0 V_2 G_0 - G_0 V_2 G_0 V_1 G_0, \quad (17)$$

⋮

To illustrate how to solve equations (15), (16), (17), ... for  $V_1$ ,  $V_2$ ,  $V_3$ , ... consider the marine case with  $L_0$  corresponding to a homogeneous reference medium of water.  $G_0$  is the Green's function for propagation in water.  $D$  is the data measured for example, with towed streamer acquisition,  $G$  is the total field the hydrophone receiver records on the measurement surface, and  $G_0$  is the field the reference wave (due to  $L_0$ ) would record at the receiver.  $V$  then represents the difference between earth properties  $L$  and water properties  $L_0$ . The solution for  $V$  is found using

$$V = V_1 + V_2 + V_3 + \dots, \quad (18)$$

where  $V_n$  is the portion of  $V$  that is  $n$ th order in the data,  $D$ . Substituting equation (18) into the forward series equation (6), then evaluating equation (6) on the measurement surface and setting terms that are equal order in the data equal we find equations (15), (16), (17), ... Solving equation (15) for  $V_1$  involves the data  $D$  and  $G_0$  (water speed propagator) and solving for  $V_1$  is analytic, and corresponds to a prestack water-speed Stolt FK migration of the data  $D$ .

Hence, solving for  $V_1$  involves an analytic water speed FK migration of the data  $D$ . Solving for  $V_2$  from equation (16) involves the same water-speed analytic Stolt FK migration

1  
2  
3  
4 of  $-G_0V_1G_0V_1G_0$ , a quantity that depends on  $V_1$  and  $G_0$ , where  $V_1$  depends on data and  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60

of  $-G_0V_1G_0V_1G_0$ , a quantity that depends on  $V_1$  and  $G_0$ , where  $V_1$  depends on data and water speed, and  $G_0$  is the water speed Green's function. Each term in the series produces  $V_n$  as an analytic Stolt FK migration of a new "effective data", where the effective data, the right-hand side of equations (15)-(17), are multiplicative combinations of factors that only depend on the data,  $D$ , and  $G_0$ . Hence, every term in the ISS is directly computed in terms of data and water speed. That's the direct non-linear inverse solution.

There are closed form inverse solutions for a 1D earth and a normal incident plane wave (see, e.g., Ware and Aki, 1969) but the inverse scattering series is the only direct inverse method for a multi-dimensional subsurface.

The inverse scattering series provides a direct method for obtaining the subsurface properties contained within the differential operator  $L$ , by inverting the series order-by-order to solve for the perturbation operator  $V$ , using only the measured data  $D$  and a reference Green's function  $G_0$ , for any assumed earth model type. Equations (15)-(17) provide  $V$  in terms of  $V_1, V_2, \dots$ , and each of the  $V_i$  is computable directly in terms of  $D$  and  $G_0$ . There is one equation, equation (15), that exactly produces  $V_1$ , and  $V_1$  is the exact portion of  $V$  that is linear in the measured data,  $D$ . The inverse operation to determine  $V_1, V_2, V_3, \dots$  is analytic, and never is updated with a bandlimited data,  $D$ . The band-limited nature of  $D$  never enters an updating process as occurs in iterative linear inversion, non-linear AVO and FWI.

## THE INVERSE SCATTERING SERIES AND ISOLATED TASK SUBSERIES

We can imagine that a set of tasks need to be achieved to determine the subsurface properties,  $V$ , from recorded seismic data,  $D$ . These tasks are achieved within equations (15), (16), (17), . . . . The inverse tasks (and processing objectives) that are within a direct inverse solution are: (1) free-surface multiple removal, (2) internal multiple removal, (3) depth imaging, (4) Q compensation without Q, and (5) non-linear direct parameter estimation. Each of these five tasks has its own task-specific subseries from the ISS for  $V_1, V_2, \dots$ , and each of those tasks is achievable directly and without subsurface information (see, e.g., Weglein et al., 2003; Weglein et al., 2012; Innanen and Lira, 2010). In Appendix A, we review the details of equations (15)-(17) for a 2D heterogeneous isotropic elastic medium.

### Direct inverse and indirect inverse

Since iterative linear inversion is the concept and thinking behind many inverse approaches we thought to make explicit the difference between that approach and a direct inverse method. The direct 2D elastic isotropic inverse solution described in Appendix A is not iterative linear inversion. Iterative linear inversion starts with equation (15). In that approach, we solve for  $V_1$  and then change the reference medium iteratively. The new differential operator  $L'_0$  and the new reference medium  $G'_0$  satisfy

$$L'_0 = L_0 - V_1 \quad \text{and} \quad L'_0 G'_0 = \delta. \quad (19)$$

In the indirect iterative linear approach, all steps basically relate to the linear relationship equation (15) with a new reference background medium, with differential operator  $L'_0$  and a new reference Green's function  $G'_0$  where in terms of the new updated reference,  $L'_0$ ,

equation (15) becomes

$$G'_0 V'_1 G'_0 = D' = (G - G'_0)_{ms}, \quad (20)$$

where  $V'_1$  is the portion of  $V$  linear in data  $(G - G'_0)_{ms}$ . We can continue to update  $L'_0$  and  $G'_0$ , and hope that indirect procedure is solving for the perturbation operator  $V$ . In contrast, the direct inverse solution equations (11) and (A-3) calls for a single unchanged reference medium, for computing  $V_1, V_2, \dots$ . For a homogeneous reference medium,  $V_1, V_2, \dots$  are each obtained by a single unchanged analytic inverse. We remind ourselves that the inverse to find  $V_1$  from data, is the same exact unchanged analytic inverse operation to find  $V_2, V_3, \dots$ , from equations (15),(16), $\dots$ , which is completely distinct and different from equations (19) and (20) and higher iterates.

For ISS direct inversion, there are no numerical inverses, no generalized inverses, no inverses of matrices that are computed from and contain noisy band-limited data. The latter issue is terribly troublesome and difficult and a serious practical problem which simply doesn't exist or occur with direct ISS methods. The inverse of operators that contain and depend on band-limited noisy data is a central and intrinsic characteristic and practical pitfall of indirect methods, model matching, updating, iterative linear inverse approaches (e.g. AVO and FWI).

**Are there any circumstances where the indirect iterative linear inversion and the direct ISS parameter estimation would be equivalent?**

Are there any circumstances where the ISS direct parameter inversion subseries would be equivalent to and correspond to the indirect iterative linear approach? Let's consider the simplest acoustic single reflector model, and a normal incident plane wave reflection data

1  
2  
3  
4 experiment with ideal full band-width perfect data. Let the upper half space have velocity  
5  
6  $c_0$  and lower half space have velocity  $c_1$  and then analyze these two methods (direct ISS  
7  
8 parameter estimation and indirect iterative linear inversion) to use the reflected data event  
9  
10 to determine the velocity of the lower half space,  $c_1$ . Yang and Weglein (2015) examined  
11  
12 and analyzed this problem and compared the results of the direct ISS method and the  
13  
14 indirect iterative linear inversion. They showed that the direct ISS inversion to estimate  $c_1$   
15  
16 converged to  $c_1$  under all circumstances and all values of  $c_0$  and  $c_1$ . In contrast, the indirect  
17  
18 linear iterative inversion had a limited range of values of  $c_0$  and  $c_1$  where it converged to  $c_1$ ,  
19  
20 and in that range it converged much slower than the direct ISS parameter estimation for  
21  
22  $c_1$ . The iterative linear inverse simply shut down and failed when the reflection coefficient,  
23  
24  $R$ , was greater than  $1/4$ . See Appendix B and Yang (2014).  
25  
26  
27  
28  
29

30 The direct ISS parameter estimation method converged to  $c_1$  for any value of the re-  
31  
32 flection coefficient  $R$ . Hence, under the simplest possible circumstance, and providing the  
33  
34 iterative linear method with an analytic Frechet derivative, as a courtesy from and gift de-  
35  
36 livered to the linear iterative from the ISS direct inversion method, the ranges of usefulness,  
37  
38 validity and relative effectiveness were never equivalent or comparable. With band-limited  
39  
40 data and more complex earth models (e.g., elastic multiparameter) this gap in the range of  
41  
42 validity, usefulness and effectiveness will necessarily widen (please see Zhang, 2006 and We-  
43  
44 glein, 2013). The indirect iterative linear inversion and the direct ISS parameter-estimation  
45  
46 method are never equivalent, and there are absolutely no simple or complicated circum-  
47  
48 stances where they are equally effective. The distinct ISS free-surface-multiple elimination  
49  
50 subseries and internal-multiple attenuation subseries are not only not dependent on sub-  
51  
52 surface properties, they are precisely the same unchanged algorithms for any earth model  
53  
54 type.  
55  
56  
57  
58  
59  
60

1  
2  
3  
4 There was an earlier time when free-surface multiples were modeled and subtracted.  
5  
6 Multiple removal methods have moved on. Parameter estimation methods continue to be  
7  
8 firmly connected to model matching and subtraction. That stark and immense difference  
9  
10 between iterative linear updating model matching and the direct inversion inverse scat-  
11  
12 tering methods is an essential point to consider and comprehend for those interested in  
13  
14 understanding these methodologies and their seismic processing and interpretation conse-  
15  
16 quences and value. It is not conceivable to even formulate an iterative linear model matching  
17  
18 method that is not dependent on a specified model type — let alone to compare it with ISS  
19  
20 model-type-independent algorithms.  
21  
22  
23  
24

### 25 26 27 **Direct ISS parameter Inversion: A time lapse application**

28  
29  
30 The direct inverse ISS elastic parameter estimation method [equation (A-3)] was successfully  
31  
32 applied (Zhang et al., 2006) in a time lapse sense to discriminate between pressure and fluid  
33  
34 saturation changes. Traditional time-lapse estimation methods were unable to predict and  
35  
36 match that direct inversion ISS discrimination.  
37  
38  
39  
40

## 41 42 **FURTHER SUBSTANTIVE DIFFERENCES BETWEEN ITERATIVE** 43 44 **LINEAR MODEL MATCHING INVERSION AND DIRECT** 45 46 **INVERSION FROM THE LIPPMANN-SCHWINGER EQUATION** 47 48 **AND THE INVERSE SCATTERING SERIES** 49 50

51  
52 The difference between iterative linear and the direct inverse of equation (A-3) is much more  
53  
54 substantive and serious than merely a different way to solve  $G_0 V_1 G_0 = D$  [equation (15)],  
55  
56  
57  
58  
59  
60

for  $V_1$ . If equation (15) is someone's entire basic theory, you can mistakenly think that

$$\hat{D}^{PP} = \hat{G}_0^P \hat{V}_1^{PP} \hat{G}_0^P \quad (21)$$

is sufficient to update

$$\hat{D}'^{PP} = \hat{G}_0'^P \hat{V}_1'^{PP} \hat{G}_0'^P \quad (22)$$

(generalizing equations (19) and (20)). Please note that  $\hat{\cdot}$  indicates variables are transformed to PS space. This step loses contact with and violates the basic operator identity  $G = G_0 + G_0VG$  for the elastic wave equation. The fundamental identity  $G = G_0 + G_0VG$  for the elastic wave equation is a non-linear multiplicative matrix relationship. For the forward and inverse series the input and output variables are matrices. The inverse solution for a change in an earth mechanical property has a nonlinear coupled dependence on all the data components

$$\begin{pmatrix} D^{PP} & D^{PS} \\ D^{SP} & D^{SS} \end{pmatrix}$$

in 2D and the P, SH, SV  $3 \times 3$  generalization in 3D.

A unique expansion of  $VG_0$  in orders of measurement values of  $(G - G_0)$  is

$$VG_0 = (VG_0)_1 + (VG_0)_2 + \dots \quad (23)$$

The scattering-theory equation allows that forward series form the opportunity to find a direct inverse solution. Substituting equation (23) into equation (6) and setting the terms of equal order in the data to be equal, we have  $D = G_0V_1G_0$ , where the higher order terms are  $V_2, V_3, \dots$ , as given in Weglein et al. (2003) page R33 equations (7)-(14).

For the elastic equation,  $V$  is a matrix and the relationship between the data and  $V_1$  is

$$\begin{pmatrix} D^{PP} & D^{PS} \\ D^{SP} & D^{SS} \end{pmatrix} = \begin{pmatrix} G_0^P & 0 \\ 0 & G_0^S \end{pmatrix} \begin{pmatrix} V_1^{PP} & V_1^{PS} \\ V_1^{SP} & V_1^{SS} \end{pmatrix} \begin{pmatrix} G_0^P & 0 \\ 0 & G_0^S \end{pmatrix}$$

$$V_1 = \begin{pmatrix} V_1^{PP} & V_1^{PS} \\ V_1^{SP} & V_1^{SS} \end{pmatrix}$$

$$V = \begin{pmatrix} V^{PP} & V^{PS} \\ V^{SP} & V^{SS} \end{pmatrix}$$

$$V = V_1 + V_2 + \dots$$

where  $V_1, V_2$  are linear, quadratic contributions to  $V$  in terms of the data,

$$D = \begin{pmatrix} D^{PP} & D^{PS} \\ D^{SP} & D^{SS} \end{pmatrix}.$$

The changes in elastic properties and density are contained in

$$V = \begin{pmatrix} V^{PP} & V^{PS} \\ V^{SP} & V^{SS} \end{pmatrix},$$

and that leads to direct and explicit solutions for the changes in mechanical properties in orders of the data,

$$D = \begin{pmatrix} D^{PP} & D^{PS} \\ D^{SP} & D^{SS} \end{pmatrix},$$

$$\frac{\Delta\gamma}{\gamma} = \left(\frac{\Delta\gamma}{\gamma}\right)_1 + \left(\frac{\Delta\gamma}{\gamma}\right)_2 + \dots$$

$$\frac{\Delta\mu}{\mu} = \left(\frac{\Delta\mu}{\mu}\right)_1 + \left(\frac{\Delta\mu}{\mu}\right)_2 + \dots$$

$$\frac{\Delta\rho}{\rho} = \left(\frac{\Delta\rho}{\rho}\right)_1 + \left(\frac{\Delta\rho}{\rho}\right)_2 + \dots$$

where  $\gamma$ ,  $\mu$  and  $\rho$  are the bulk modulus, shear modulus and density, respectively.

The ability of the forward series to have a direct inverse series derives from (1) the identity among  $G$ ,  $G_0$ ,  $V$  provided by the scattering equation and then (2) the recognition that the forward solution can be viewed as a geometric series for the data,  $D$ , in terms of  $VG_0$ . The latter derives the direct inverse series for  $VG_0$  in terms of the data.

Viewing the forward problem and series as the Taylor series

$$D(m) = D(m_0) + D'(m_0)\Delta m + \frac{D''(m_0)}{2}\Delta m^2 + \dots, \quad (24)$$

in which the derivatives are Frechet derivatives, in terms of  $\Delta m$  does not offer a direct inverse series, and hence there is no choice but to solve the forward series in an inverse sense. It is that fact that results in all current AVO and FWI methods being modeling methods that are solved in an inverse sense. Among references that solve a forward problem in an inverse sense in P-wave AVO are Beylkin and Burridge (1990), Boyse and Keller (1986), Burridge et al. (1998), Castagna and Smith (1994), Clayton and Stolt (1981), Foster et al. (2010), Goodway (2010), Goodway et al. (1997), Shuey (1985), Smith and Gidlow (2000), Stolt (1989), and Stolt and Weglein (1985). The intervention of the explicit relationship among  $G$ ,  $G_0$ , and  $V$  (the scattering equation) in a Taylor series-like form produces a geometric series and a direct inverse solution.

The linear equations are:

$$\begin{pmatrix} \hat{D}^{PP} & \hat{D}^{PS} \\ \hat{D}^{SP} & \hat{D}^{SS} \end{pmatrix} = \begin{pmatrix} \hat{G}_0^P & 0 \\ 0 & \hat{G}_0^S \end{pmatrix} \begin{pmatrix} \hat{V}_1^{PP} & \hat{V}_1^{PS} \\ \hat{V}_1^{SP} & \hat{V}_1^{SS} \end{pmatrix} \begin{pmatrix} \hat{G}_0^P & 0 \\ 0 & \hat{G}_0^S \end{pmatrix} \quad (25)$$

$$\hat{D}^{PP} = \hat{G}_0^P \hat{V}_1^{PP} \hat{G}_0^P \quad (26)$$

$$\hat{D}^{PS} = \hat{G}_0^P \hat{V}_1^{PS} \hat{G}_0^S \quad (27)$$

$$\hat{D}^{SP} = \hat{G}_0^S \hat{V}_1^{SP} \hat{G}_0^P \quad (28)$$

$$\hat{D}^{SS} = \hat{G}_0^S \hat{V}_1^{SS} \hat{G}_0^S \quad (29)$$

$$\begin{aligned} \tilde{D}^{PP}(k_g, 0; -k_g, 0; \omega) &= -\frac{1}{4} \left( 1 - \frac{k_g^2}{\nu_g^2} \right) \tilde{a}_\rho^{(1)}(-2\nu_g) \\ &\quad - \frac{1}{4} \left( 1 + \frac{k_g^2}{\nu_g^2} \right) \tilde{a}_\gamma^{(1)}(-2\nu_g) + \frac{2k_g^2 \beta_0^2}{(\nu_g^2 + k_g^2) \alpha_0^2} \tilde{a}_\mu^{(1)}(-2\nu_g) \end{aligned} \quad (30)$$

$$\begin{aligned} \tilde{D}^{PS}(\nu_g, \eta_g) &= -\frac{1}{4} \left( \frac{k_g}{\nu_g} + \frac{k_g}{\eta_g} \right) \tilde{a}_\rho^{(1)}(-\nu_g - \eta_g) \\ &\quad - \frac{\beta_0^2}{2\omega^2} k_g (\nu_g + \eta_g) \left( 1 - \frac{k_g^2}{\nu_g \eta_g} \right) \tilde{a}_\mu^{(1)}(-\nu_g - \eta_g) \end{aligned} \quad (31)$$

$$\begin{aligned} \tilde{D}^{SP}(\nu_g, \eta_g) &= \frac{1}{4} \left( \frac{k_g}{\nu_g} + \frac{k_g}{\eta_g} \right) \tilde{a}_\rho^{(1)}(-\nu_g - \eta_g) \\ &\quad + \frac{\beta_0^2}{2\omega^2} k_g (\nu_g + \eta_g) \left( 1 - \frac{k_g^2}{\nu_g \eta_g} \right) \tilde{a}_\mu^{(1)}(-\nu_g - \eta_g) \text{ and} \end{aligned} \quad (32)$$

$$\begin{aligned} \tilde{D}^{SS}(k_g, \eta_g) &= \frac{1}{4} \left( 1 - \frac{k_g^2}{\eta_g^2} \right) \tilde{a}_\rho^{(1)}(-2\eta_g) \\ &\quad - \left[ \frac{\eta_g^2 + k_g^2}{4\eta_g^2} - \frac{2k_g^2}{\eta_g^2 + k_g^2} \right] \tilde{a}_\mu^{(1)}(-2\eta_g), \end{aligned} \quad (33)$$

where  $a_\gamma^{(1)}$ ,  $a_\mu^{(1)}$ , and  $a_\rho^{(1)}$  are the linear estimates of the changes in bulk modulus, shear modulus, and density, respectively.  $k_g$  is the Fourier conjugate to the receiver position  $x_g$  and  $\nu_g$  and  $\eta_g$  are the vertical wavenumbers for the P and S reference waves, respectively,

where

$$\nu_g^2 + k_g^2 = \frac{\omega^2}{\alpha_0^2}$$

$$\eta_g^2 + k_g^2 = \frac{\omega^2}{\beta_0^2}$$

and  $\alpha_0$  and  $\beta_0$  are the P and S velocities in the reference medium, respectively. The direct quadratic non-linear equations are

$$\begin{aligned} & \begin{pmatrix} \hat{G}_0^P & 0 \\ 0 & \hat{G}_0^S \end{pmatrix} \begin{pmatrix} \hat{V}_2^{PP} & \hat{V}_2^{PS} \\ \hat{V}_2^{SP} & \hat{V}_2^{SS} \end{pmatrix} \begin{pmatrix} \hat{G}_0^P & 0 \\ 0 & \hat{G}_0^S \end{pmatrix} \\ &= - \begin{pmatrix} \hat{G}_0^P & 0 \\ 0 & \hat{G}_0^S \end{pmatrix} \begin{pmatrix} \hat{V}_1^{PP} & \hat{V}_1^{PS} \\ \hat{V}_1^{SP} & \hat{V}_1^{SS} \end{pmatrix} \begin{pmatrix} \hat{G}_0^P & 0 \\ 0 & \hat{G}_0^S \end{pmatrix} \begin{pmatrix} \hat{V}_1^{PP} & \hat{V}_1^{PS} \\ \hat{V}_1^{SP} & \hat{V}_1^{SS} \end{pmatrix} \begin{pmatrix} \hat{G}_0^P & 0 \\ 0 & \hat{G}_0^S \end{pmatrix}, \end{aligned} \quad (34)$$

$$\hat{G}_0^P \hat{V}_2^{PP} \hat{G}_0^P = -\hat{G}_0^P \hat{V}_1^{PP} \hat{G}_0^P \hat{V}_1^{PP} \hat{G}_0^P - \hat{G}_0^P \hat{V}_1^{PS} \hat{G}_0^S \hat{V}_1^{SP} \hat{G}_0^P, \quad (35)$$

$$\hat{G}_0^P \hat{V}_2^{PS} \hat{G}_0^S = -\hat{G}_0^P \hat{V}_1^{PP} \hat{G}_0^P \hat{V}_1^{PS} \hat{G}_0^S - \hat{G}_0^P \hat{V}_1^{PS} \hat{G}_0^S \hat{V}_1^{SS} \hat{G}_0^S, \quad (36)$$

$$\hat{G}_0^S \hat{V}_2^{SP} \hat{G}_0^P = -\hat{G}_0^S \hat{V}_1^{SP} \hat{G}_0^P \hat{V}_1^{PP} \hat{G}_0^P - \hat{G}_0^S \hat{V}_1^{SS} \hat{G}_0^S \hat{V}_1^{SP} \hat{G}_0^P, \quad (37)$$

$$\hat{G}_0^S \hat{V}_2^{SS} \hat{G}_0^S = -\hat{G}_0^S \hat{V}_1^{SP} \hat{G}_0^P \hat{V}_1^{PS} \hat{G}_0^S - \hat{G}_0^S \hat{V}_1^{SS} \hat{G}_0^S \hat{V}_1^{SS} \hat{G}_0^S. \quad (38)$$

Because  $\hat{V}_1^{PP}$  relates to  $\hat{D}^{PP}$ ,  $\hat{V}_1^{PS}$  relates to  $\hat{D}^{PS}$ , and so on, the four components of the data will be coupled in the nonlinear elastic inversion. We cannot perform the direct nonlinear inversion without knowing all components of the data. Thus, the direct nonlinear solution determines the data needed for a direct inverse. That, in turn, defines what a linear estimate means. That is, a linear estimate of a parameter is an estimate of a parameter that is linear in data that can directly invert for that parameter. Since  $D^{PP}$ ,  $D^{PS}$ ,  $D^{SP}$ , and  $D^{SS}$  are needed to determine  $a_\gamma$ ,  $a_\mu$ , and  $a_\rho$  directly, a linear estimate for any one

1  
2  
3  
4 of these quantities requires simultaneously solving equations (30)-(33). See, e.g., Weglein  
5  
6 et al. (2009) for further detail.  
7  
8

9  
10 Those direct nonlinear formulas are like the direct solution for the quadratic equation  
11 mentioned above and solve directly and nonlinearly for changes in the velocities,  $\alpha$ ,  $\beta$   
12 and the density  $\rho$  in a 1D elastic Earth. Stolt and Weglein (2012), present the linear  
13 equations for a 3D Earth that generalize equations (30)-(33). Those formulas prescribe  
14 precisely what data you need as input, and they dictate how to compute those sought-after  
15 mechanical properties, given the necessary data. There is no search or cost function, and  
16 the unambiguous and unequivocal data needed are full multicomponent data — PP, PS,  
17 SP, and SS — for all traces in each of the P and S shot records. The direct algorithm  
18 determines first the data needed and then the appropriate algorithms for using those data  
19 to directly compute the sought-after changes in the Earth's mechanical properties. Hence,  
20 any method that calls itself inversion (let alone full-wave inversion) for determining changes  
21 in elastic properties, and in particular the P-wave velocity  $\alpha$ , and that inputs only P-data,  
22 is more off base, misguided, and lost than the methods that sought two or more functions  
23 of depth from a single trace. You can model-match P-data until the cows come home, and  
24 that takes a lot of computational effort and people with advanced degrees in math and  
25 physics computing Frechet derivatives, and requires sophisticated  $L_P$  norm cost functions  
26 and local or global search engines, so it must be reasonable, scientific, and worthwhile. Why  
27 can't we use just PP-data to invert for changes in  $V_P$ ,  $V_S$ , and density, because Zoeppritz  
28 says that we can model PP from those quantities, and because we have, using PP-data with  
29 angle variation, enough dimension? As stated above, data dimension is good, but not good  
30 enough for a direct inversion of those elastic properties.  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58

59 Adopting equations (21) and (22) as in AVO and FWI, there is a violation of the  
60

1  
2  
3  
4 fundamental relationship between changes in a medium and changes in a wavefield,  $G =$   
5  
6  $G_0 + G_0VG$ , which is as serious as considering problems involving a right triangle and  
7  
8 violating the Pythagorean theorem . That is, iteratively updating  $PP$  data with an elastic  
9  
10 model violates the basic relationship between changes in a medium,  $V$ , and changes in the  
11  
12 wavefield,  $G - G_0$ , for the simplest elastic earth model.  
13  
14  
15

16  
17 This direct inverse method for parameter estimation provides a platform for amplitude  
18  
19 analysis, and a solid framework and direct methodology for the goals and objectives of  
20  
21 indirect methods like AVO and FWI. A direct method for the purposes of amplitude analysis  
22  
23 provides a method that derives from, respects and honors the fundamental identity and  
24  
25 relationship  $G = G_0 + G_0VG$ . Iteratively inverting multi-component data has the correct  
26  
27 data but doesn't correspond to a direct inverse algorithm. To honor  $G = G_0 + G_0VG$ , you  
28  
29 need both the data and the algorithm that direct inverse prescribes. Not recognizing the  
30  
31 message that an operator identity and the elastic wave equation unequivocally communicate  
32  
33 is a fundamental and significant contribution to the gap in effectiveness in current AVO and  
34  
35 FWI methods and application [equation (A-3)]. This analysis generalizes to 3D with P, SH,  
36  
37 and SV data.  
38  
39  
40  
41  
42  
43

#### 44 **The role of direct and indirect methods**

45  
46

47 There's a role for direct and indirect methods in practical real-world applications. In our  
48  
49 view, indirect methods are to be called upon for recognizing that the world is more com-  
50  
51 plicated than the physics that we assume in our models and methods. For the part of  
52  
53 the world that you are capturing in your model and physics, nothing compares to direct  
54  
55 methods for clarity and effectiveness. An optimal indirect method would seek to satisfy a  
56  
57  
58  
59  
60

1  
2  
3  
4 cost function that derives from a property of the direct method. In that way the indirect  
5  
6 and direct methods would be aligned, consistent and cooperative for accommodating both  
7  
8 the part of the world described by your physical model (with a direct inverse method) and  
9  
10 the part that is outside (with an indirect method).  
11  
12  
13

### 14 15 16 **The indirect method of model matching primaries and multiples (so-called** 17 18 **FWI)** 19

20  
21 All model matching inverse approaches are indirect methods. Iterative linear inversion  
22  
23 model matching is an indirect search methodology, and ad-hoc, and without a firm and  
24  
25 solid foundation and theoretical and conceptual framework. Never the less, we can imagine  
26  
27 and understand that model matching primaries and multiples, rather than only primaries,  
28  
29 could improve upon matching only primaries. However, model matching primaries and  
30  
31 multiples remains ad hoc and indirect and always on much shakier footing than direct  
32  
33 inversion for the same inversion goals and objectives. Direct ISS inversion for parameter  
34  
35 estimation only requires and inputs primaries.  
36  
37  
38  
39  
40  
41  
42  
43

44 For all multidimensional seismic applications, the only direct inverse solution is provided  
45  
46 by the operator identity equation (4) and is in the form of a series equations (15)-(17), the  
47  
48 inverse scattering series (Weglein et al., 2003). It can achieve all processing objectives within  
49  
50 a single framework and a single set of equations (15)-(17) without requiring any subsurface  
51  
52 information. There are distinct isolated-task inverse scattering subseries derived from the  
53  
54 ISS, which can perform free-surface multiple removal (Carvalho et al., 1992; Weglein et al.,  
55  
56 1997), internal multiple removal (Araújo et al., 1994; Weglein et al., 2003), depth imaging  
57  
58  
59  
60

1  
2  
3  
4 (e.g. Shaw, 2005; Liu, 2006; Weglein et al., 2012), parameter estimation (Zhang, 2006;  
5  
6 Liang, 2013; Li, 2011; Yang and Weglein, 2015), and Q compensation without needing,  
7  
8 estimating or determining Q (Innanen and Weglein, 2007; Innanen and Lira, 2010; Lira,  
9  
10 2009), and each achieves its objective directly and without subsurface information. The  
11  
12 direct inverse solution (e.g., Weglein et al., 2003, 2009) provides a framework and firm  
13  
14 math-physics foundation that unambiguously defines both the data requirements and the  
15  
16 distinct algorithms to perform each and every associated task within the inverse problem,  
17  
18 directly and without subsurface information.  
19  
20  
21  
22  
23  
24  
25

26  
27 Having an ad hoc indirect method as the starting point places a cloud over issue iden-  
28  
29 tification when less than satisfactory results arise with field data. In addition, we saw  
30  
31 that direct inversion parameter estimation has a significantly less dependence on the low  
32  
33 frequency data components in comparison with indirect methods like nonlinear AVO and  
34  
35 FWI.  
36  
37

38  
39 Only a direct solution can provide algorithmic clarity, confidence and effectiveness. The  
40  
41 current industry standard AVO and FWI, using variants of model-matching and iterative  
42  
43 linear inverse, are indirect methods, and iteratively linearly updating  $P$  data or multi-  
44  
45 component data (with or without multiples) does not correspond to, and will not produce,  
46  
47 a direct solution.  
48  
49  
50  
51

52 **All direct inverse methods for structural determination and amplitude**  
53  
54 **analysis require only primaries**  
55  
56  
57  
58  
59  
60

1  
2  
3  
4 In Weglein (2016) the role of primaries and multiples in imaging are examined and  
5 analyzed. The most capable and interpretable migration method derives from predicting a  
6 source and receiver experiment at depth. For data consisting of primaries and multiples, a  
7 discontinuous velocity model is needed to achieve that predicted experiment at depth. With  
8 that discontinuous velocity model, free-surface and internal multiples play no role in the  
9 migration and the exact same image results with or without multiples (see Weglein, 2016).  
10 For a smooth velocity model, multiples will result in false and misleading images and must  
11 be removed before the migration and migration-inversion of primaries.  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22

23  
24 In Weglein et al. (2003), the ISS direct depth imaging (without a velocity model or  
25 subsurface information) removes free-surface and internal multiples prior to the distinct sub-  
26 series that input primaries and perform depth imaging and amplitude analysis, respectively,  
27 each directly and without subsurface information, and only using and requiring primaries.  
28  
29  
30  
31  
32

33 Hence, all direct inversion methods, both those with and those without subsurface/velocity  
34 information, require only primaries for complete structural determination and amplitude  
35 analysis. Methods that seek to use multiples to address issues from less than a complete  
36 acquisition of primaries, are seeking an appropriate image of an unrecorded primary.  
37  
38  
39  
40  
41  
42

43 Indirect methods are ad hoc without a clear or firm math physics foundation and frame-  
44 work, and they start without knowing whether “the indirect solution” is in fact a solution.  
45 A more complete or fuller data set being matched between model data and field data each  
46 with primaries and multiples could at times improve upon matching only primaries, but the  
47 entire approach is indirect and ad hoc with or without multiples, and lacks the benefits of  
48 a direct method. With indirect methods there is no framework and theory to rely on, and  
49 to have confidence that a solution is forthcoming under any circumstances.  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60

1  
2  
3  
4  
5  
6  
7  
8  
9  
10 If we seek the parameters of an elastic heterogeneous isotropic subsurface, then the  
11 differential operator in the operator identity is the differential operator that occurs in the  
12 elastic, heterogeneous isotropic wave equation. From forty years of AVO and amplitude  
13 analysis application in the petroleum industry, the elastic isotropic model is the base-line  
14 minimally realistic and acceptable earth model-type for amplitude analysis, for example,  
15 for AVO and FWI. Then taking the operator identity (called the Lippmann-Schwinger  
16 or scattering theory equation) for the elastic wave equation, we can obtain a direct inverse  
17 solution for the changes in elastic properties and density. The direct inverse solution specifies  
18 both the data required and the algorithm to achieve a direct parameter estimation solution.  
19 In this paper we explain how this methodology differs from all current AVO and FWI  
20 methods, that are in fact forms of model matching . Multicomponent data consisting of  
21 only primaries are needed for a direct inverse solution for subsurface properties. This paper  
22 focuses on one specific inverse task, parameter estimation, within the overall and broader  
23 set of inversion objectives and tasks. Furthermore, the impact of band-limited data and  
24 noise, are discussed and compared for the direct ISS parameter estimation and indirect  
25 (AVO and FWI) inversion methods.  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47

48 In this paper, we focused on analyzing and examining the direct inverse solution that  
49 the ISS inversion subseries provides for parameter estimation. The distinct issues of: (1)  
50 data requirements, (2) model-type, and (3) inversion algorithm for the direct inverse are all  
51 important (Weglein, 2015b). For an elastic heterogeneous medium, we show that the direct  
52 inverse requires multi-component/PS (P-component and S-component) data and prescribes  
53  
54  
55  
56  
57  
58  
59  
60

1  
2  
3  
4 how that data are utilized for a direct parameter estimation solution (Zhang and Weglein,  
5  
6  
7 2006).

## 10 11 CONCLUSIONS

12  
13  
14 In this paper, we describe, illustrate and analyze the considerable conceptual, substantive  
15 and practical benefit and added-value that a direct parameter inversion from the inverse  
16 scattering series provides in comparison with all current indirect inverse methods (e.g., AVO  
17 and FWI) for amplitude analysis goals and objectives. A direct method provides a solution  
18 that: (1) we can have confidence is a solution to the defined problem of interest and (2) if  
19 the method doesn't improve drilling decisions, then we know that the issue is the problem  
20 of interest is not the problem that we need to be interested in. On the other hand, indirect  
21 methods like AVO and FWI, have a plethora of approaches and paths, and when less than  
22 satisfactory results occur we don't know whether the issue is the chosen problem of interest  
23 or the choice among innumerable indirect solutions.  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37

38 The ability to clearly and unambiguously define the origin and root cause of seismic  
39 breakdown and challenges is an essential and critically important step in designing and  
40 executing a strategy to provide new and more capable methods to the seismic processing  
41 and interpretation toolbox.  
42  
43  
44  
45  
46  
47

48 Only direct inversion methods can provide that clarity and definitiveness. They are also  
49 unique in providing the confidence that the problem of interest is actually being addressed  
50 to enhance and advance our seismic processing and interpretation goals. For ISS parameter  
51 estimation, while the recorded data is of course band limited, the band-limited data is never  
52 used to compute the updated inverse operator for the next iterated linear step, since the  
53  
54  
55  
56  
57  
58  
59  
60

1  
2  
3  
4 inverse operator is fixed and analytic for every term in the inverse scattering series. That's  
5  
6 one of several important and substantive differences pointed out in this paper between the  
7  
8 direct inverse ISS parameter estimation method and all indirect inversion methods, e.g.,  
9  
10 AVO and FWI. We provide an explicit analytic example and comparison between direct  
11  
12 ISS parameter estimation and the indirect linear updating model matching concepts behind  
13  
14 AVO and FWI.  
15  
16

17  
18  
19 Direct and indirect methods both can play an important role and function in seismic  
20  
21 processing: where the former accommodates and addresses the assumed physics and the  
22  
23 latter provides a channel for real world phenomena beyond the assumed physics. Both  
24  
25 are called for within a comprehensive and effective seismic processing and interpretation  
26  
27 strategy.  
28  
29

### 30 31 32 **ACKNOWLEDGMENTS** 33 34

35  
36 The author is grateful to all M-OSRP sponsors for their support and encouragement of this  
37  
38 research. Dr. Jim Mayhan is thanked for his invaluable assist in preparing this paper. The  
39  
40 author is deeply grateful and appreciative to Dr. Huyen Bui for her encouragement to write  
41  
42 and submit this paper. The author thanks Dr. Bill Goodway and Dr. Jingfeng Zhang for  
43  
44 their two detailed, thoughtful and constructive reviews. All of their suggestions enhanced  
45  
46 and benefited this paper. The author is deeply grateful to Dr. Haiyan Zhang and Dr. Hong  
47  
48 Liang for their historic contributions to direct ISS elastic parameter estimation.  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60

## REFERENCES

- 1  
2  
3  
4  
5  
6  
7 Anderson, J. E., L. Tan, and D. Wang, 2012, Time-reversal checkpointing methods for RTM  
8 and FWI: *Geophysics*, **77**, S93–S103.  
9  
10  
11 Araújo, F. V., A. B. Weglein, P. M. Carvalho, and R. H. Stolt, 1994, Inverse scattering  
12 series for multiple attenuation: An example with surface and internal multiples: 64th  
13 Annual International Meeting, SEG, Expanded Abstracts, 1039–1041.  
14  
15  
16  
17 Baumstein, A., J. E. Anderson, D. L. Hinkley, and J. R. Krebs, 2009, Scaling of the objective  
18 function gradient for full-wavefield inversion: 79th Annual International Meeting, SEG,  
19 Expanded Abstracts, 2243–2247.  
20  
21  
22  
23 Ben-Hadj-ali, H., S. Operto, and J. Vireux, 2009, Efficient 3D frequency-domain full-  
24 waveform inversion (FWI) with phase encoding: 71st Conference & Exhibition, EAGE,  
25 Extended Abstracts, P004.  
26  
27  
28  
29 Ben-Hadj-ali, H., S. Operto, and J. Virieux, 2008, Velocity model building by 3D frequency-  
30 domain, full-waveform inversion of wide-aperture seismic data: *Geophysics*, **73**, VE101–  
31 VE117.  
32  
33  
34  
35  
36  
37  
38  
39 Beylkin, G., and R. Burrigge, 1990, Linearized inverse scattering problem of acoustics and  
40 elasticity: *Wave Motion*, **12**, 15–22.  
41  
42  
43  
44 Biondi, B., and P. Sava, 1999, Wave-equation migration velocity analysis: 69th Annual  
45 International Meeting, SEG, Expanded Abstracts, 1723–1726.  
46  
47  
48  
49 Biondi, B., and W. Symes, 2004, Angle-domain common-image gathers for migration ve-  
50 locity analysis by wavefield-continuation imaging: *Geophysics*, **69**, 1283–1298.  
51  
52  
53  
54 Blum, E. K., 1972, *Numerical analysis and computation: Theory and practice*: Addison-  
55 Wesley Publishing Company.  
56  
57  
58  
59 Boyse, W. E., and J. B. Keller, 1986, *Inverse elastic scattering in three dimensions: The*  
60

- 1  
2  
3  
4 Journal of the Acoustical Society of America, **79**, 215–218.
- 5  
6  
7 Brandsberg-Dahl, S., M. de Hoop, and B. Ursin, 1999, Velocity analysis in the common  
8  
9 scattering-angle/azimuth domain: 69th Annual International Meeting, SEG, Expanded  
10  
11 Abstracts, 1715–1718.
- 12  
13  
14 Brossier, R., S. Operto, and J. Virieux, 2009, Robust elastic frequency-domain full-waveform  
15  
16 inversion using the  $L_1$  norm: Geophysical Research Letters, **36**, L20310.
- 17  
18  
19 Burridge, R., M. de Hoop, D. Miller, and C. Spencer, 1998, Multiparameter inversion in  
20  
21 anisotropic elastic media: Geophysical Journal International, **134**, 757–777.
- 22  
23  
24 Carvalho, P. M., 1992, Free-surface multiple reflection elimination method based on nonlin-  
25  
26 ear inversion of seismic data: PhD thesis, Universidade Federal da Bahia. (In Portuguese).
- 27  
28  
29 Carvalho, P. M., A. B. Weglein, and R. H. Stolt, 1992, Nonlinear inverse scattering for mul-  
30  
31 tiple suppression: Application to real data. Part I: 62nd Annual International Meeting,  
32  
33 SEG, Expanded Abstracts, 1093–1095.
- 34  
35  
36 Castagna, J. P., and S. W. Smith, 1994, Comparison of AVO indicators: A modeling study:  
37  
38 Geophysics, **59**, 1849–1855.
- 39  
40  
41 Chavent, G., and C. Jacewitz, 1995, Determination of background velocities by multiple  
42  
43 migration fitting: Geophysics, **60**, 476–490.
- 44  
45  
46 Claerbout, J. F., 1971, Toward a unified theory of reflector mapping: Geophysics, **36**,  
47  
48 467–481.
- 49  
50  
51 Clayton, R. W., and R. H. Stolt, 1981, A Born-WKBJ inversion method for acoustic reflec-  
52  
53 tion data: Geophysics, **46**, 1559–1567.
- 54  
55  
56 Crase, E., A. Pica, M. Noble, J. McDonald, and A. Tarantola, 1990, Robust elastic nonlinear  
57  
58 waveform inversion: Application to real data: Geophysics, **55**, 527–538.
- 59  
60  
61 Ferreira, A., 2011, Internal multiple removal in offshore Brazil seismic data using the Inverse

- 1  
2  
3  
4 Scattering Series: Master's thesis, University of Houston.  
5  
6  
7 Fichtner, A., 2011, Full seismic waveform modeling and inversion: Springer-Verlag.  
8  
9 Foster, D. J., R. G. Keys, and F. D. Lane, 2010, Interpretation of AVO anomalies: Geo-  
10 physics, **75**, 75A3–75A13.  
11  
12  
13 Gauthier, O., J. Virieux, and A. Tarantola, 1986, Two dimensional nonlinear inversion of  
14 seismic waveforms: Geophysics, **51**, 1387–1403.  
15  
16  
17  
18 Goodway, B., 2010, The magic of Lamé: The Leading Edge, **29**, 1432.  
19  
20  
21 Goodway, B., T. Chen, and J. Downton, 1997, Improved AVO fluid detection and lithology  
22 discrimination using Lamé petrophysical parameters; “ $\lambda\rho$ ”, “ $\mu\rho$ ”, and “ $\lambda/\mu$  fluid stack”,  
23 from P and S inversions: 67th Annual International Meeting, SEG, Expanded Abstracts,  
24 183–186.  
25  
26  
27  
28  
29  
30 Guasch, L., M. Warner, T. Nangoo, J. Morgan, A. Umpleby, I. Stekl, and N. Shah, 2012,  
31 Elastic 3D full-waveform inversion: 82nd Annual International Meeting, SEG, Expanded  
32 Abstracts, 1–5.  
33  
34  
35  
36  
37 Hawthorn, A., 2009, Real Time Seismic Measurements Whilst Drilling — A Drilling Op-  
38 timization Measurement for Subsalt Wells: Presented at the EAGE Subsalt Imaging  
39 Workshop, Cairo, Egypt.  
40  
41  
42  
43  
44 Iledare, O. O., and M. J. Kaiser, 2007, Competition and performance in oil and gas lease  
45 sales and development in the U.S. Gulf of Mexico OCS Region, 1983-1999: Technical  
46 report, U.S. Dept. of the Interior, Minerals Management Service, Gulf of Mexico OCS  
47 Region. (OCS Study MMS 2007-034. 106pp.).  
48  
49  
50  
51  
52  
53 Innanen, K. A., and J. E. Lira, 2010, Direct nonlinear q-compensation of seismic primaries  
54 reflecting from a stratified, two-parameter absorptive medium: Geophysics, **75**, V13–V23.  
55  
56  
57  
58 Innanen, K. A., and A. B. Weglein, 2007, On the construction of an absorptive-dispersive  
59  
60

1  
2  
3  
4 medium model via direct linear inversion of reflected seismic primaries: *Inverse Problems*,  
5  
6  
7 **23**.

8  
9 Kapoor, S., D. Vigh, H. Li, and D. Derharoutian, 2012, Full-waveform inversion for detailed  
10  
11 velocity model building: 74th Annual Conference and Exhibition, EAGE, Extended Ab-  
12  
13 stracts, W011.

14  
15  
16 Keys, R. G., and A. B. Weglein, 1983, Generalized linear inversion and the first Born theory  
17  
18 for acoustic media: *Journal of Mathematical Physics*, **24**, 1444–1449.

19  
20  
21 Li, X., 2011, I.- Multi-parameter depth imaging using the inverse scattering series; II.-  
22  
23 Multi-component direct non-linear inversion for elastic earth properties using the inverse  
24  
25 scattering series: PhD thesis, University of Houston.

26  
27  
28 Li, X., F. Liu, and A. B. Weglein, 2011, Dealing with the wavelet aspect of the low frequency  
29  
30 issue: A synthetic example: M-OSRP 2010-2011 Annual Report, 82–89.

31  
32  
33 Liang, H., 2013, Addressing several key outstanding issues and extending the capability  
34  
35 of the inverse scattering subseries for internal multiple attenuation, depth imaging, and  
36  
37 parameter estimation: PhD thesis, University of Houston.

38  
39  
40 Liang, H., A. B. Weglein, and X. Li, 2010, Initial tests for the impact of matching and  
41  
42 mismatching between the Earth model and the processing model for the ISS imaging and  
43  
44 parameter estimation: M-OSRP 2009-2010 Annual Report, 165–180.

45  
46  
47 Lira, J. E. M., 2009, Compensating reflected primary seismic amplitudes for elastic and ab-  
48  
49 sorptive transmission losses when the physical properties of the overburden are unknown:  
50  
51 PhD thesis, University of Houston.

52  
53  
54 Liu, F., 2006, Multi-dimensional depth imaging without an adequate velocity model: PhD  
55  
56 thesis, University of Houston.

57  
58  
59 Luo, Y., P. G. Kelamis, Q. Fu, S. Huo, G. Sindi, S.-Y. Hsu, and A. B. Weglein, 2011,  
60

- 1  
2  
3  
4 Elimination of land internal multiples based on the inverse scattering series: *The Leading*  
5  
6  
7 Edge, **30**, 884–889.  
8
- 9 Matson, K. H., 1997, An inverse-scattering series method for attenuating elastic multiples  
10  
11 from multicomponent land and ocean bottom seismic data: PhD thesis, University of  
12  
13 British Columbia.  
14
- 15  
16 Nolan, C., and W. Symes, 1997, Global solution of a linearized inverse problem for the wave  
17  
18 equation: *Communications on Partial Differential Equations*, **22**, 919–952.  
19
- 20  
21 Pratt, R. G., 1999, Seismic waveform inversion in the frequency domain, Part 1: Theory  
22  
23 and verification in a physical scale model: *Geophysics*, **64**, 888–901.  
24
- 25  
26 Pratt, R. G., and R. M. Shipp, 1999, Seismic waveform inversion in the frequency domain,  
27  
28 Part 2: Fault delineation in sediments using crosshole data: *Geophysics*, **64**, 902–914.  
29
- 30  
31 Rickett, J., and P. Sava, 2002, Offset and angle-domain common image-point gathers for  
32  
33 shot-profile migration: *Geophysics*, **67**, 883–889.  
34
- 35  
36 Sava, P., B. Biondi, and J. Etgen, 2005, Wave-equation migration velocity analysis by  
37  
38 focusing diffractions and reflections: *Geophysics*, **70**, U19–U27.  
39
- 40  
41 Sava, P., and S. Fomel, 2003, Angle-domain common-image gathers by wavefield continua-  
42  
43 tion methods: *Geophysics*, **68**, 1065–1074.  
44
- 45  
46 Shaw, S. A., 2005, An inverse scattering series algorithm for depth imaging of reflection data  
47  
48 from a layered acoustic medium with an unknown velocity model: PhD thesis, University  
49  
50 of Houston.  
51
- 52  
53 Shaw, S. A., and A. B. Weglein, 2004, A leading order imaging series for prestack data  
54  
55 acquired over a laterally invariant acoustic medium. Part II: Analysis for data missing  
56  
57 low frequencies: *M-OSRP 2003-2004 Annual Report*, 140–167.  
58
- 59  
60 Shuey, R. T., 1985, A simplification of the Zoeppritz equations: *Geophysics*, **50**, 609–614.

1  
2  
3  
4 Sirgue, L., O. I. Barkved, J. Dellinger, J. Etgen, U. Albertin, and J. H. Kommedal, 2010,  
5 Full-waveform inversion: the next leap forward in imaging at Valhall: *First Break*, **28**,  
6  
7 65–70.  
8  
9

10  
11 Sirgue, L., O. I. Barkved, J. P. Van Gestel, O. J. Askim, and J. H. Kommedal, 2009, 3D  
12 waveform inversion on Valhall wide-azimuth OBC: 71st Annual Conference and Exhibi-  
13 tion, EAGE, Extended Abstracts, U038.  
14  
15

16  
17 Sirgue, L., B. Denel, and F. Gao, 2012, Challenges and value of applying FWI to depth  
18 imaging projects: Presented at the 74th Conference and Exhibition, EAGE, Extended  
19 Abstracts.  
20  
21  
22  
23

24  
25 Smith, G. C., and M. Gidlow, 2000, A comparison of the fluid factor with  $\lambda$  and  $\mu$  in AVO  
26 analysis: 70th Annual International Meeting, SEG, Expanded Abstracts, 122–125.  
27  
28

29  
30 Stolt, R. H., 1978, Migration by Fourier transform: *Geophysics*, **43**, 23–48.  
31

32 ———, 1989, Seismic inversion revisited: *Geophysical Inversion*, Society for Industrial  
33 and Applied Mathematics, 3–19. (Proceedings of the Geophysical Inversion Workshop,  
34 September 27–29, 1989, Houston, Texas).  
35  
36  
37

38  
39 Stolt, R. H., and A. B. Weglein, 1985, Migration and inversion of seismic data: *Geophysics*,  
40 **50**, 2458–2472.  
41  
42

43 ———, 2012, *Seismic imaging and inversion: Application of linear inverse theory*: Cambridge  
44 University Press.  
45  
46  
47

48 Symes, W. W., 2008, Migration velocity analysis and waveform inversion: *Geophysical*  
49 *Prospecting*, **56**, 765–790.  
50  
51

52  
53 Symes, W. W., and J. J. Carazzone, 1991, Velocity inversion by differential semblance  
54 optimization: *Geophysics*, **56**, 654–663.  
55  
56

57  
58 Tarantola, A., 1986, A strategy for nonlinear elastic inversion of seismic reflection data:  
59  
60

- 1  
2  
3  
4 Geophysics, **51**, 1893–1903.  
5  
6  
7 ———, 1987, Inverse problem theory: Method for data fitting and model parameter estima-  
8  
9 tion: Elsevier.  
10  
11 Taylor, J. R., 1972, Scattering theory: the quantum theory of nonrelativistic collisions:  
12  
13 John Wiley & Sons, Inc.  
14  
15  
16 Valenciano, A., B. Biondi, and A. Guitton, 2006, Target-oriented wave-equation inversion:  
17  
18 Geophysics, **71**, A35–A38.  
19  
20  
21 Vigh, D., and E. W. Starr, 2008, 3D prestack plane-wave, full-waveform inversion: Geo-  
22  
23 physics, **73**, VE135–VE144.  
24  
25  
26 Ware, J. A., and K. Aki, 1969, Continuous and discrete inverse-scattering problems in a  
27  
28 stratified elastic medium. i. plane waves at normal incidence: The Journal of the Acous-  
29  
30 tical Society of America, **45**, 911–921.  
31  
32  
33 Weglein, A. B., 2012a, Short note: A formalism for (1) modeling the amplitude and phase of  
34  
35 pressure waves from a heterogeneous elastic medium and (2) selecting and predicting P-  
36  
37 wave events that have only experienced pressure-wave episodes in their history: M-OSRP  
38  
39 2011-2012 Annual Report, 364–370.  
40  
41  
42 ———, 2012b, Short note: An alternative adaptive subtraction criteria (to energy minimiza-  
43  
44 tion) for free surface multiple removal: M-OSRP 2011-2012 Annual Report, 375.  
45  
46  
47 ———, 2013, A timely and necessary antidote to indirect methods and so-called P-wave  
48  
49 FWI: The Leading Edge, **32**, 1192–1204.  
50  
51  
52 ———, 2015a, A direct inverse solution for AVO/FWI parameter estimation objectives: 85th  
53  
54 Annual Internat. Mtg., SEG, Expanded Abstracts, 3367–3370.  
55  
56  
57 ———, 2015b, Direct Inversion and FWI. Invited keynote address given at the SEG  
58  
59 Workshop Full-waveform Inversion: Filling the Gaps, Abu Dhabi, UAE, available at  
60

1  
2  
3  
4 [http://mosrp.uh.edu/events/event-news/arthur-b-weglein-will-present-an-](http://mosrp.uh.edu/events/event-news/arthur-b-weglein-will-present-an-invited-key-note-address-on-direct-inversion-at-the-seg-workshop-on-fwi-30-march-1-april-2015-in-abu-dhabi-uae)  
5  
6 [invited-key-note-address-on-direct-inversion-at-the-seg-workshop-on-fwi-](http://mosrp.uh.edu/events/event-news/arthur-b-weglein-will-present-an-invited-key-note-address-on-direct-inversion-at-the-seg-workshop-on-fwi-30-march-1-april-2015-in-abu-dhabi-uae)  
7  
8 [30-march-1-april-2015-in-abu-dhabi-uae.](http://mosrp.uh.edu/events/event-news/arthur-b-weglein-will-present-an-invited-key-note-address-on-direct-inversion-at-the-seg-workshop-on-fwi-30-march-1-april-2015-in-abu-dhabi-uae)

9  
10  
11 ———, 2016, Multiples: Signal or noise?: *Geophysics*, **81**, V283–V302.

12  
13 Weglein, A. B., F. V. Araújo, P. M. Carvalho, R. H. Stolt, K. H. Matson, R. T. Coates,  
14  
15 D. Corrigan, D. J. Foster, S. A. Shaw, and H. Zhang, 2003, Inverse scattering series and  
16  
17 seismic exploration: *Inverse Problems*, **19**, R27–R83.

18  
19  
20 Weglein, A. B., D. J. Foster, K. H. Matson, S. A. Shaw, P. M. Carvalho, and D. Corrigan,  
21  
22 2002, Predicting the correct spatial location of reflectors without knowing or determin-  
23  
24 ing the precise medium and wave velocity: initial concept, algorithm and analytic and  
25  
26 numerical example: *Journal of Seismic Exploration*, **10**, 367–382.

27  
28  
29 Weglein, A. B., F. A. Gasparotto, P. M. Carvalho, and R. H. Stolt, 1997, An inverse-  
30  
31 scattering series method for attenuating multiples in seismic reflection data: *Geophysics*,  
32  
33 **62**, 1975–1989.

34  
35  
36 Weglein, A. B., S.-Y. Hsu, P. Terenghi, X. Li, and R. H. Stolt, 2011, Multiple attenuation:  
37  
38 Recent advances and the road ahead (2011): *The Leading Edge*, **30**, 864–875.

39  
40  
41 Weglein, A. B., F. Liu, X. Li, P. Terenghi, E. Kragh, J. D. Mayhan, Z. Wang, J. Mispel,  
42  
43 L. Amundsen, H. Liang, L. Tang, and S.-Y. Hsu, 2012, Inverse scattering series direct  
44  
45 depth imaging without the velocity model: first field data examples: *Journal of Seismic*  
46  
47 *Exploration*, **21**, 1–28.

48  
49  
50 Weglein, A. B., and K. Matson, 1998, Inverse-scattering interval multiple attenuation: an  
51  
52 analytic example and subevent interpretation, *in* *Mathematical methods in geophysical*  
53  
54 *imaging*: SPIE, 1008–1017.

55  
56  
57 Weglein, A. B., H. Zhang, A. C. Ramírez, F. Liu, and J. E. M. Lira, 2009, Clarifying the  
58  
59  
60

1  
2  
3  
4 underlying and fundamental meaning of the approximate linear inversion of seismic data:  
5  
6 Geophysics, **74**, WCD1–WCD13.  
7

8  
9 Weglein, A. B., Y. Zou, Q. Fu, F. Liu, J. Wu, C. Ma, R. H. Stolt, X. Lin, and J. D. Mayhan,  
10  
11 2016, The first migration method that is equally effective for all acquired frequencies  
12  
13 for imaging and inverting at the target and reservoir: Presented at the 86th Annual  
14  
15 International Meeting, SEG, Expanded Abstracts. (Accepted 26 May 2016).  
16

17  
18 Wu, J., and A. B. Weglein, 2014, Elastic Green's theorem preprocessing for on-shore internal  
19  
20 multiple attenuation: Theory and initial synthetic data tests: 84th Annual International  
21  
22 Meeting, SEG, Expanded Abstracts, 4299–4304.  
23

24  
25 Yang, J., 2014, Extending the Inverse Scattering Series free-surface multiple elimination  
26  
27 and internal multiple attenuation algorithms by incorporating the source wavelet and  
28  
29 radiation pattern: Examining and evaluating the benefit and added-value: PhD thesis,  
30  
31 University of Houston.  
32

33  
34 Yang, J., and A. B. Weglein, 2015, A first comparison of the inverse scattering series non-  
35  
36 linear inversion and the iterative linear inversion for parameter estimation: 85th Annual  
37  
38 International Meeting, SEG, Expanded Abstracts, 1263–1267.  
39

40  
41 Zhang, H., 2006, Direct non-linear acoustic and elastic inversion: towards fundamentally  
42  
43 new comprehensive and realistic target identification: PhD thesis, University of Houston.  
44

45  
46 Zhang, H., and A. B. Weglein, 2006, Direct non-linear inversion of multi-parameter 1d  
47  
48 elastic media using the inverse scattering series: 76th International Annual Meeting,  
49  
50 SEG, Expanded Abstracts, 284–311.  
51

52  
53 Zhang, H., A. B. Weglein, R. G. Keys, D. J. Foster, and S. A. Shaw, 2006, Discrimina-  
54  
55 tion between pressure and fluid saturation using direct non-linear inversion method: an  
56  
57 application to time-lapse seismic data: M-OSRP 2005-2006 Annual Report, 312–327.  
58  
59  
60

Zhang, Y., and B. Biondi, 2013, Moveout-based wave-equation migration velocity analysis: Geophysics, **78**, U31–U39.

Zhou, H., L. Amundsen, and G. Zhang, 2012, Fundamental issues in full-waveform inversion: Presented at the 82nd Annual International Meeting, SEG, Expanded Abstracts.

## APPENDIX A: THE OPERATOR IDENTITY AND DIRECT INVERSE SOLUTION FOR A 2D HETEROGENEOUS ISOTROPIC ELASTIC MEDIUM

We describe the forward and direct inverse method for a 2D elastic heterogeneous earth (see Zhang, 2006).

The 2D elastic wave equation for a heterogeneous isotropic medium (Zhang, 2006) is

$$L\vec{u} = \begin{pmatrix} f_x \\ f_z \end{pmatrix} \quad \text{and} \quad \hat{L} \begin{pmatrix} \phi^P \\ \phi^S \end{pmatrix} = \begin{pmatrix} F^P \\ F^S \end{pmatrix}, \quad (\text{A-1})$$

where  $\vec{u}$ ,  $f_x$ , and  $f_z$  are the displacement and forces in displacement coordinates and  $\phi^P$ ,  $\phi^S$  and  $F^P$ ,  $F^S$  are the  $P$  and  $S$  waves and the force components in  $P$  and  $S$  coordinates, respectively. The operators  $L$  and  $L_0$  in the actual and reference elastic media are

$$L = \left[ \rho\omega^2 \begin{pmatrix} 1 & 0 \\ 0 & 1 \end{pmatrix} + \begin{pmatrix} \partial_x\gamma\partial_x + \partial_z\mu\partial_z & \partial_x(\gamma - 2\mu)\partial_z + \partial_z\mu\partial_x \\ \partial_z(\gamma - 2\mu)\partial_x + \partial_x\mu\partial_z & \partial_z\gamma\partial_z + \partial_x\mu\partial_x \end{pmatrix} \right],$$

$$L_0 = \left[ \rho\omega^2 \begin{pmatrix} 1 & 0 \\ 0 & 1 \end{pmatrix} + \begin{pmatrix} \gamma_0\partial_x^2 + \mu_0\partial_z^2 & (\gamma_0 - \mu_0)\partial_x\partial_z \\ (\gamma_0 - \mu_0)\partial_x\partial_z & \mu_0\partial_x^2 + \gamma_0\partial_z^2 \end{pmatrix} \right],$$

and the perturbation  $V$  is

$$V \equiv L_0 - L = \begin{bmatrix} a_\rho\omega^2 + \alpha_0^2\partial_x a_\gamma\partial_x + \beta_0^2\partial_z a_\mu\partial_z & \partial_x(\alpha_0^2 a_\gamma - 2\beta_0^2 a_\mu)\partial_z + \beta_0^2\partial_z a_\mu\partial_x \\ \partial_z(\alpha_0^2 a_\gamma - 2\beta_0^2 a_\mu)\partial_x + \beta_0^2\partial_x a_\mu\partial_z & a_\rho\omega^2 + \alpha_0^2\partial_z a_\gamma\partial_z + \beta_0^2\partial_x a_\mu\partial_x \end{bmatrix},$$

where the quantities  $a_\rho \equiv \rho/\rho_0 - 1$ ,  $a_\gamma \equiv \gamma/\gamma_0 - 1$ , and  $a_\mu \equiv \mu/\mu_0 - 1$  are defined in terms of the bulk modulus, shear modulus and density  $(\gamma_0, \mu_0, \rho_0, \gamma, \mu, \rho)$  in the reference and actual media, respectively.

The forward problem is found from the identity equation (6) and the elastic wave equation (A-1) in  $PS$  coordinates as

$$\begin{aligned} \hat{G} - \hat{G}_0 &= \hat{G}_0 \hat{V} \hat{G}_0 + \hat{G}_0 \hat{V} \hat{G}_0 \hat{V} \hat{G}_0 + \dots, \\ \begin{pmatrix} \hat{D}^{PP} & \hat{D}^{PS} \\ \hat{D}^{SP} & \hat{D}^{SS} \end{pmatrix} &= \begin{pmatrix} \hat{G}_0^P & 0 \\ 0 & \hat{G}_0^S \end{pmatrix} \begin{pmatrix} \hat{V}^{PP} & \hat{V}^{PS} \\ \hat{V}^{SP} & \hat{V}^{SS} \end{pmatrix} \begin{pmatrix} \hat{G}_0^P & 0 \\ 0 & \hat{G}_0^S \end{pmatrix} \\ &+ \begin{pmatrix} \hat{G}_0^P & 0 \\ 0 & \hat{G}_0^S \end{pmatrix} \begin{pmatrix} \hat{V}^{PP} & \hat{V}^{PS} \\ \hat{V}^{SP} & \hat{V}^{SS} \end{pmatrix} \begin{pmatrix} \hat{G}_0^P & 0 \\ 0 & \hat{G}_0^S \end{pmatrix} \begin{pmatrix} \hat{V}^{PP} & \hat{V}^{PS} \\ \hat{V}^{SP} & \hat{V}^{SS} \end{pmatrix} \begin{pmatrix} \hat{G}_0^P & 0 \\ 0 & \hat{G}_0^S \end{pmatrix} + \dots, \end{aligned} \quad (\text{A-2})$$

and the inverse solution, equations (15)-(17), for the elastic equation (A-1) is

$$\begin{aligned} \begin{pmatrix} \hat{D}^{PP} & \hat{D}^{PS} \\ \hat{D}^{SP} & \hat{D}^{SS} \end{pmatrix} &= \begin{pmatrix} \hat{G}_0^P & 0 \\ 0 & \hat{G}_0^S \end{pmatrix} \begin{pmatrix} \hat{V}_1^{PP} & \hat{V}_1^{PS} \\ \hat{V}_1^{SP} & \hat{V}_1^{SS} \end{pmatrix} \begin{pmatrix} \hat{G}_0^P & 0 \\ 0 & \hat{G}_0^S \end{pmatrix}, \\ &\begin{pmatrix} \hat{G}_0^P & 0 \\ 0 & \hat{G}_0^S \end{pmatrix} \begin{pmatrix} \hat{V}_2^{PP} & \hat{V}_2^{PS} \\ \hat{V}_2^{SP} & \hat{V}_2^{SS} \end{pmatrix} \begin{pmatrix} \hat{G}_0^P & 0 \\ 0 & \hat{G}_0^S \end{pmatrix} \\ &= - \begin{pmatrix} \hat{G}_0^P & 0 \\ 0 & \hat{G}_0^S \end{pmatrix} \begin{pmatrix} \hat{V}_1^{PP} & \hat{V}_1^{PS} \\ \hat{V}_1^{SP} & \hat{V}_1^{SS} \end{pmatrix} \begin{pmatrix} \hat{G}_0^P & 0 \\ 0 & \hat{G}_0^S \end{pmatrix} \begin{pmatrix} \hat{V}_1^{PP} & \hat{V}_1^{PS} \\ \hat{V}_1^{SP} & \hat{V}_1^{SS} \end{pmatrix} \begin{pmatrix} \hat{G}_0^P & 0 \\ 0 & \hat{G}_0^S \end{pmatrix}, \end{aligned} \quad (\text{A-3})$$

⋮

where  $\hat{V}^{PP} = \hat{V}_1^{PP} + \hat{V}_2^{PP} + \hat{V}_3^{PP} + \dots$  and any one of the four matrix elements of  $V$

requires the four components of the data

$$\begin{pmatrix} \hat{D}^{PP} & \hat{D}^{PS} \\ \hat{D}^{SP} & \hat{D}^{SS} \end{pmatrix}.$$

The 3D heterogeneous isotropic elastic generalization of the above 2D forward and direct inverse elastic isotropic method begins with the linear 3D form found in Stolt and Weglein (2012) page 159.

In summary, from equation (A-2),  $\hat{D}^{PP}$  can be determined in terms of the four elements of  $V$ . The four components  $\hat{V}^{PP}$ ,  $\hat{V}^{PS}$ ,  $\hat{V}^{SP}$ , and  $\hat{V}^{SS}$  require the four components of  $D$ . That's what the general relationship  $G = G_0 + G_0VG$  requires, i.e., a direct non-linear inverse solution is a solution order-by-order in the four matrix elements of  $D$  (in 2D). The generalization of the forward series equation (A-2) and the inverse series equation (A-3) for a direct inversion of an elastic isotropic heterogeneous medium in 3D involves the  $3 \times 3$  data,  $D$ , and  $V$  matrices in terms of P, SH and SV data and start with the linear  $G_0V_1G_0 = D$  on page 179 of Stolt and Weglein (2012).

## APPENDIX B: NUMERICAL EXAMPLES FOR A 1D NORMAL INCIDENT WAVE ON AN ACOUSTIC MEDIUM

Numerical examples for a 1D normal incident wave on a acoustic medium are shown in this section. First, we examine and compare the convergence of the ISS direct inversion and iterative inversion. Second, the rate of convergence of the ISS inversion subseries is examined and studied using an analytic example, where the ISS method converges and the iterative linear method doesn't and where both methods converge.

## The operator identity for a 1D acoustic medium

For a normal incidence plane wave on a 1D acoustic medium (where only the velocity is assumed to vary), the model we consider here consists of two half-spaces with acoustic velocities  $c_0$  and  $c_1$  and an interface located at  $z = a$  as shown in Figure 1. If we put the source and receiver on the surface,  $z = 0$ , the pressure wave

$$D(t) = R\delta(t - 2a/c_0) \quad (\text{A-4})$$

will be recorded, where the reflection coefficient  $R = \frac{c_1 - c_0}{c_1 + c_0}$ . For this example,  $D(t)$  is the only input to the direct ISS inverse and the iterative inversion methods. Since we will assume knowledge of the velocity in the upper half space,  $c_0$ , the location of the reflector at  $z = a$  is not an issue. We will focus on only determining the change of velocity across the reflector at  $z = a$ . The operators  $L_0$  and  $L$  in the reference and actual acoustic media are

$$L_0 = \frac{d^2}{dz^2} + \frac{\omega^2}{c_0^2} \quad \text{and} \quad L = \frac{d^2}{dz^2} + \frac{\omega^2}{c^2(z)}, \quad (\text{A-5})$$

and we characterize the velocity perturbation as,

$$\alpha(z) \equiv 1 - \frac{c_0^2}{c^2(z)}. \quad (\text{A-6})$$

The perturbation  $V$  (Weglein et al., 2003) can be expressed as

$$V(z) = L_0 - L = \frac{\omega^2}{c_0^2} - \frac{\omega^2}{c^2(z)} = k_0^2 \alpha(z), \quad (\text{A-7})$$

where  $\omega$  is the angular frequency and  $k_0 = \omega/c_0$ .  $c_0$  and  $c(z)$  are the reference and local acoustic velocity. Therefore, the inverse series of  $V$  [equation (11)] becomes

$$\alpha(z) = \alpha_1(z) + \alpha_2(z) + \alpha_3(z) + \dots \quad (\text{A-8})$$

That is

$$V_1 = k_0^2 \alpha_1, \quad V_2 = k_0^2 \alpha_2, \quad \dots \quad (\text{A-9})$$

From the inverse scattering series [Equations (15)-(17)], Shaw and Weglein (2004) isolated the leading order imaging subseries and the direct non-linear inversion subseries.

In this section, we will focus on studying the convergence properties of the ISS inversion subseries. The inversion only terms isolated from the inverse scattering series (Zhang, 2006; Li, 2011) are

$$\alpha(z) = \alpha_1(z) - \frac{1}{2}\alpha_1^2(z) + \frac{3}{16}\alpha_1^3(z) + \dots \quad (\text{A-10})$$

For a 1D normal incidence case, the linear equation (15) solves for  $\alpha_1$  in terms of the single trace data  $D(t)$  (Shaw and Weglein, 2004) as

$$\alpha_1(z) = 4 \int_{-\infty}^z D(z') dz', \quad (\text{A-11})$$

where  $z' = c_0 t/2$ . For a single reflector, inserting data  $D$  [equation (A-4)] gives

$$\alpha_1 = 4RH(z - a), \quad (\text{A-12})$$

where  $R$  is the reflection coefficient  $R = \frac{c_1 - c_0}{c_1 + c_0}$  and  $H$  is the Heaviside function. When  $z > a$ , substituting  $\alpha_1$  into equation (A-10), the ISS direct non-linear inversion subseries in terms of  $R$  can be written as (where  $\alpha$  is the magnitude of  $\alpha(z)$  for  $z > a$ )

$$\alpha = 4R - 8R^2 + 12R^3 + \dots = 4R \sum_{n=0}^{\infty} (n+1)(-R)^n. \quad (\text{A-13})$$

After solving for  $\alpha$ , the inverted velocity  $c(z)$  can be obtained through  $c_1 = c_0(1 - \alpha)^{-1/2}$  [equation (A-7)].

Considering the convergence property of the series for  $\alpha$  or the inversion subseries, we can calculate the ratio test,

$$\left| \frac{\alpha_{n+1}}{\alpha_n} \right| = \left| \frac{(n+2)(-R)^{n+1}}{(n+1)(-R)^n} \right| = \left| \frac{n+2}{n+1} R \right|. \quad (\text{A-14})$$

If  $\lim_{n \rightarrow \infty} \left| \frac{\alpha_{n+1}}{\alpha_n} \right| < 1$ , this subseries converges absolutely. That is

$$|R| < \lim_{n \rightarrow \infty} \frac{n+1}{n+2} = 1. \quad (\text{A-15})$$

Therefore, the ISS direct non-linear inversion subseries converges when the reflection coefficient  $|R|$  is less than 1, which is always true. Hence, for this example, the ISS inversion subseries will converge under any velocity contrasts between the two media.

For the iterative linear inversion, we use the first linear estimate of  $\alpha = \alpha_1^1$  to compute the first estimate of  $c_1 = c_1^1$ . Then we choose the first estimate of  $c_1 = c_0(1 - \alpha_1^1)^{-1/2} \equiv c_1^1$  as the new reference velocity,  $c_0^1 = c_0(1 - \alpha_1^1)^{-1/2}$ , where  $\alpha_1^1 = 4R_1$  and  $R_1 = \frac{c_1 - c_0}{c_1 + c_0}$ . Repeating the linear process with a new reflection coefficient  $R_2$  (again exploiting the analytic inverse generously provided by ISS to benefit the iterative linear inverse approach) gives

$$R_2 = \frac{c_1 - c_0^1}{c_1 + c_0^1}, \quad \alpha_1^2 = 4R_2 \quad \text{and} \quad c_1^2 = c_0^1(1 - \alpha_1^2)^{-1/2} = c_0^2, \quad (\text{A-16})$$

⋮

$$R_{n+1} = \frac{c_1 - c_0^n}{c_1 + c_0^n}, \quad \alpha_1^{n+1} = 4R_{n+1} \quad \text{and} \quad c_1^n = c_0^{n-1}(1 - \alpha_1^n)^{-1/2} = c_0^n, \quad (\text{A-17})$$

where  $\alpha_1^n = n$ th estimate of  $\alpha_1$  and  $c_1^n = n$ th estimate of  $c_1$ . The questions are (1) under what conditions does  $c_1^n$  approach  $c_1$ , and (2) when it converges, what is its rate of convergence.

From the above analysis, we can see that the ISS method for  $\alpha$  always converges and the resulting  $\alpha$  can be used to find  $c_1$ . For the iterative linear inverse, there are values of  $\alpha_1$  such that you cannot compute a real  $c_1^1$ . When  $\alpha_1^1 > 1$  and  $4R > 1$ ,  $R > 1/4$  and you cannot compute an updated reference velocity and the method simply shuts down and fails. The inverse scattering series never computes a new reference and doesn't suffer that problem, with the series for  $\alpha$  always converging and then outputting  $c_1$ , the correct unknown velocity

below the reflector.

### The convergence of the ISS direct inversion and iterative inversion

In this section, we will examine and compare the convergence property of the ISS inversion [equation (A-13)] and the iterative linear inversion for different velocity contrasts in the 1D acoustic case. In the 1D normal incident acoustic model (Figure 1), only one parameter (velocity) varies and a plane wave propagates into the medium. There is only a single reflector and we assume the velocity is known above the reflector and unknown below the reflector. We will compare the convergence of the perturbation  $\alpha$  and the inversion results by using the ISS direct non-linear method and the iterative linear method.

With the reference velocity  $c_0 = 1500m/s$ , two analytic examples with different velocity contrasts for  $c_1 = 2000m/s$  and  $c_1 = 3000m/s$  are examined. Figure 2 shows the estimated  $\alpha$  by the ISS method (green line) for  $c_1 = 2000m/s$ . The red line represents the actual  $\alpha$  that is calculated from the model. The horizontal axis represents the order of the ISS inversion subseries. The vertical axis shows the value of  $\alpha$ . The updated estimation of  $\alpha$  using the iterative inversion method (blue line) is shown in Figure 3. The horizontal axis represents the iteration numbers in the iterative inversion method. From Figures 2 and 3, we can see that at the small velocity contrast, the estimated  $\alpha$  by ISS method becomes the actual  $\alpha$  after about five orders calculation and the updated estimation of  $\alpha$  by the iterative inversion method goes to zero as we expected, because after several iteration, the updated model is close to and approaching to the actual model. Figure 4 represents the velocity estimation. The green blue lines represent the estimated velocity by using the ISS inversion method and the iterative inversion method, respectively. We can see that

at the small velocity contrast, both methods converge and produce correct velocity after five orders or iterations and the ISS inversion method converges faster than the iterative inversion method.

Figure 5 shows the estimated  $\alpha$  by the ISS method (green line) for  $c_1 = 3000m/s$ . When the velocity contrast is larger, i.e.,  $R > 0.25$ , the iterative inversion method can not be computable, but the ISS inversion method always converges (see green line in Figure 5) after the summation of more orders in computing  $\alpha$ .

As we know, the reflection coefficient  $R$  is almost always less than 0.2 in practice, so that both the ISS method and the iterative method converge, but the ISS method converges faster than the iterative method. Moreover, for more complicated circumstances (e.g., the elastic non-normal incidence case), the difference between the ISS method and the iterative method is much greater, not just on the algorithms, but also on data requirements and on how the band-limited noisy nature of the seismic data impact the inverse operators in the iterative method but not in the ISS method.

### The rate of convergence of the ISS inversion subseries

The rate of convergence of the estimated  $\alpha$  or the ISS inversion subseries [equation (A-13)] is analytically examined and studied. Since  $\alpha$  is always convergent when  $R < 1$ , the summation of this subseries (Zhang, 2006) is

$$\alpha = 4R \sum_{n=0}^{\infty} (n+1)(-R)^n = 4R \frac{1}{(1+R)^2}. \quad (\text{A-18})$$

If the error between the estimated and the actual  $\alpha$  is monotonically decreasing, it means the subseries is a term-by-term added value improvement towards determining the actual medium properties. If this error is increasing before decreasing, it means that the estimate

of  $\alpha$  becomes worse before it gets better. The error for the first order and the error for the second order have the relation,

$$|\alpha - \alpha_1 - \alpha_2| > |\alpha - \alpha_1|, \quad (\text{A-19})$$

i.e.,

$$\left| 4R \frac{3R^2 + 2R^3}{(1+R)^2} \right| > \left| 4R \frac{-R^2 - 2R}{(1+R)^2} \right|. \quad (\text{A-20})$$

After simplification, it gives

$$R^2 + R - 1 > 0. \quad (\text{A-21})$$

We can solve it and obtain the reflection coefficient  $R < \frac{-1-\sqrt{5}}{2} = -1.618$  or  $R > \frac{-1+\sqrt{5}}{2} = 0.618$ . Therefore, when  $R > 0.618$ , the error increases first. Similarly, if the error for the third order is greater than that for the second order, we get  $R > 0.667$ . If the error for the fourth order is greater than that for the third order, we obtain  $R > 0.721$ . In summary, when  $R > 0.618$  the error increases and the estimated  $\alpha$  gets worse before getting better. The sum of terms in the direct inverse ISS solution (for very large contrasts) requires certain partial sums to be temporally worse in order for the entire series to produce the correct velocity. The dashed green line in Figure 6 shows that when the reflection coefficient  $R$  is equal to 0.618, the error for the first order is equal to the error for the second order.

As the analytic calculation, when the reflection coefficient  $R$  is smaller than 0.618, this inversion subseries gives a monotonically term-by-term added value improvement towards determining  $c_1$ . When the reflection coefficient is larger than 0.618, the ISS inversion series still converges, but the estimation of  $\alpha$  will become worse before it gets better. Each term in the series works towards the final goal. Sometimes when more terms in the series are included, the estimation looks temporally worse, but once it starts to improve the estimation at a specific order, the approximations never become worse again, every single

1  
2  
3  
4 term after that order will produce an improved estimation. The locally worse partial sum  
5  
6 behavior is, in fact, purposeful and essential for convergence to and for computing the  
7  
8 exact velocity. The direct inverse solution fulfills its commitment to always predict  $c_1$ ,  
9  
10 and not necessarily to having order-by-order improvement. The ISS direct inversion always  
11  
12 converges in contrast to the iterative linear inverse method. This property has also been  
13  
14 indicated by Carvalho (1992) in the free-surface multiple elimination subseries, e.g., what  
15  
16 appears to make a second-order free-surface multiple larger with a first-order free-surface  
17  
18 algorithm is actually helpful and necessary for preparing the second-order multiple to be  
19  
20 removed by the higher-order terms.  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60

## FIGURE CAPTIONS

Figure 1: 1D acoustic model with velocities  $c_0$  over  $c_1$ .

Figure 2: The estimated  $\alpha$  at  $R = 0.1429$ : The horizontal axis is the order of the ISS subseries and the vertical axis shows the value of  $\alpha$ . The red line shows the actual value of  $\alpha = 0.4375$ . The green line shows the estimation of  $\alpha$  using the ISS inversion method order-by-order.

Figure 3: The updated  $\alpha$  at  $R = 0.1429$ : The horizontal axis is the iteration numbers and the vertical axis shows the updated value of  $\alpha$ . The blue line represents the updated estimation of  $\alpha$  using the iterative inversion method.

Figure 4: The estimated velocity by using the ISS inversion method (green line) and the iterative inversion method (blue line).

Figure 5: The estimated  $\alpha$  at  $R = 0.3333$ : The horizontal axis is the order of the ISS subseries and the vertical axis represents the value of  $\alpha$ . The red line shows the actual value of  $\alpha = 0.7500$ . The green line shows the estimation of  $\alpha$  using the ISS inversion method order-by-order.


Figure 6: The error (dashed green line) of estimated  $\alpha$  at  $R = 0.6180$  and  $\alpha = 0.9443$ .

1  
2 Incidence wave  
3  
4  
5  
6  
7  
8


 $z$  $c_0$ 

9 <https://mc.manuscriptcentral.com/interpretation>


 $z = a$  $c_1$   
10  
11  
12

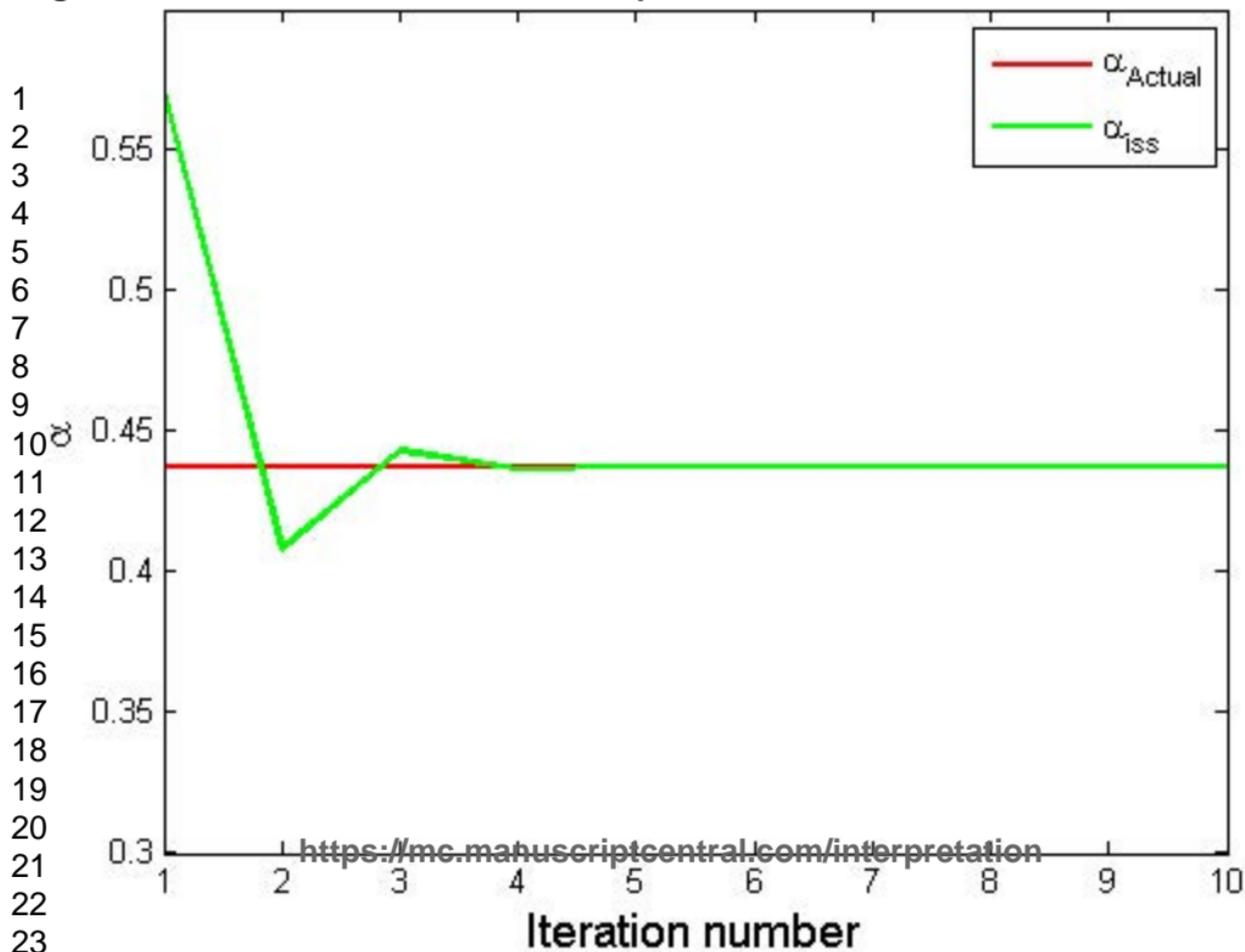

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23

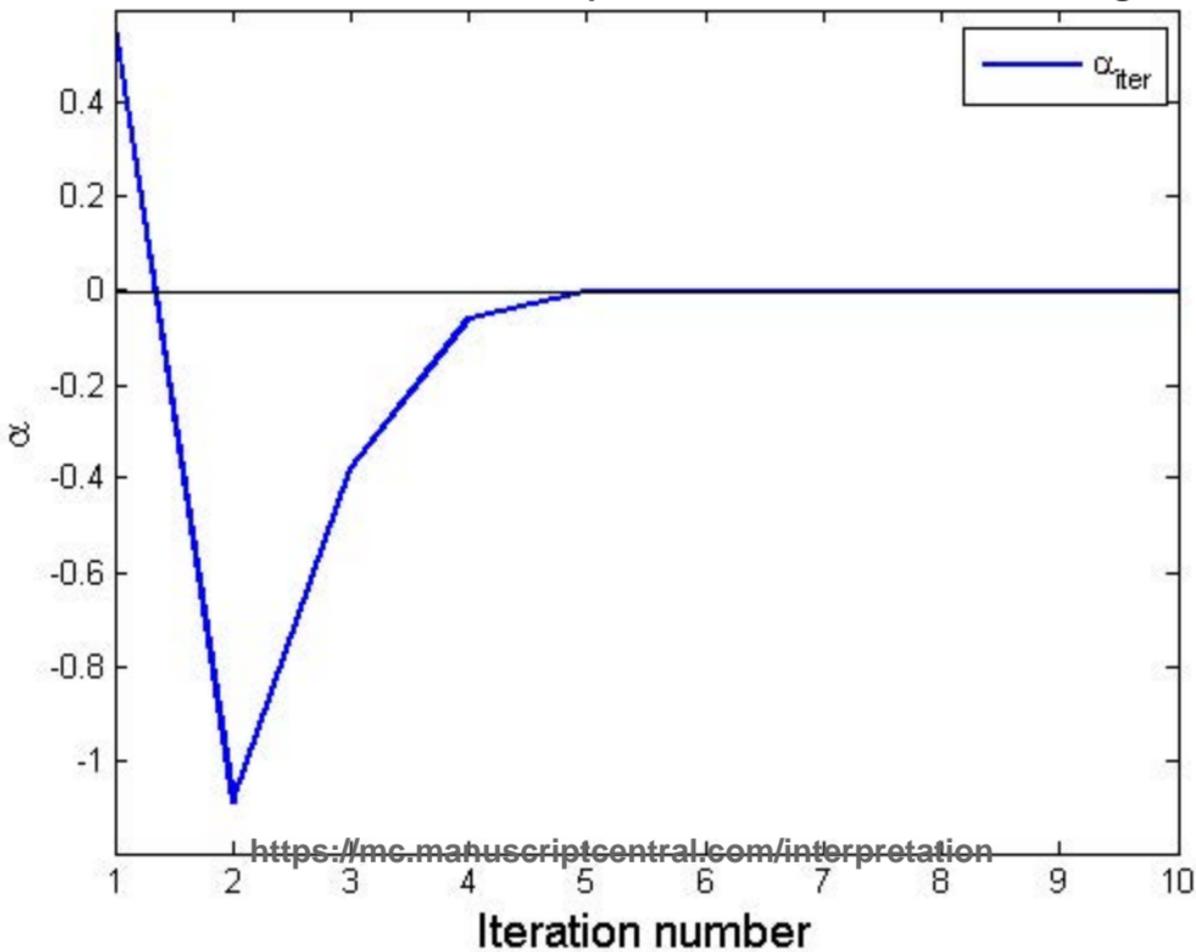


## Estimated velocity

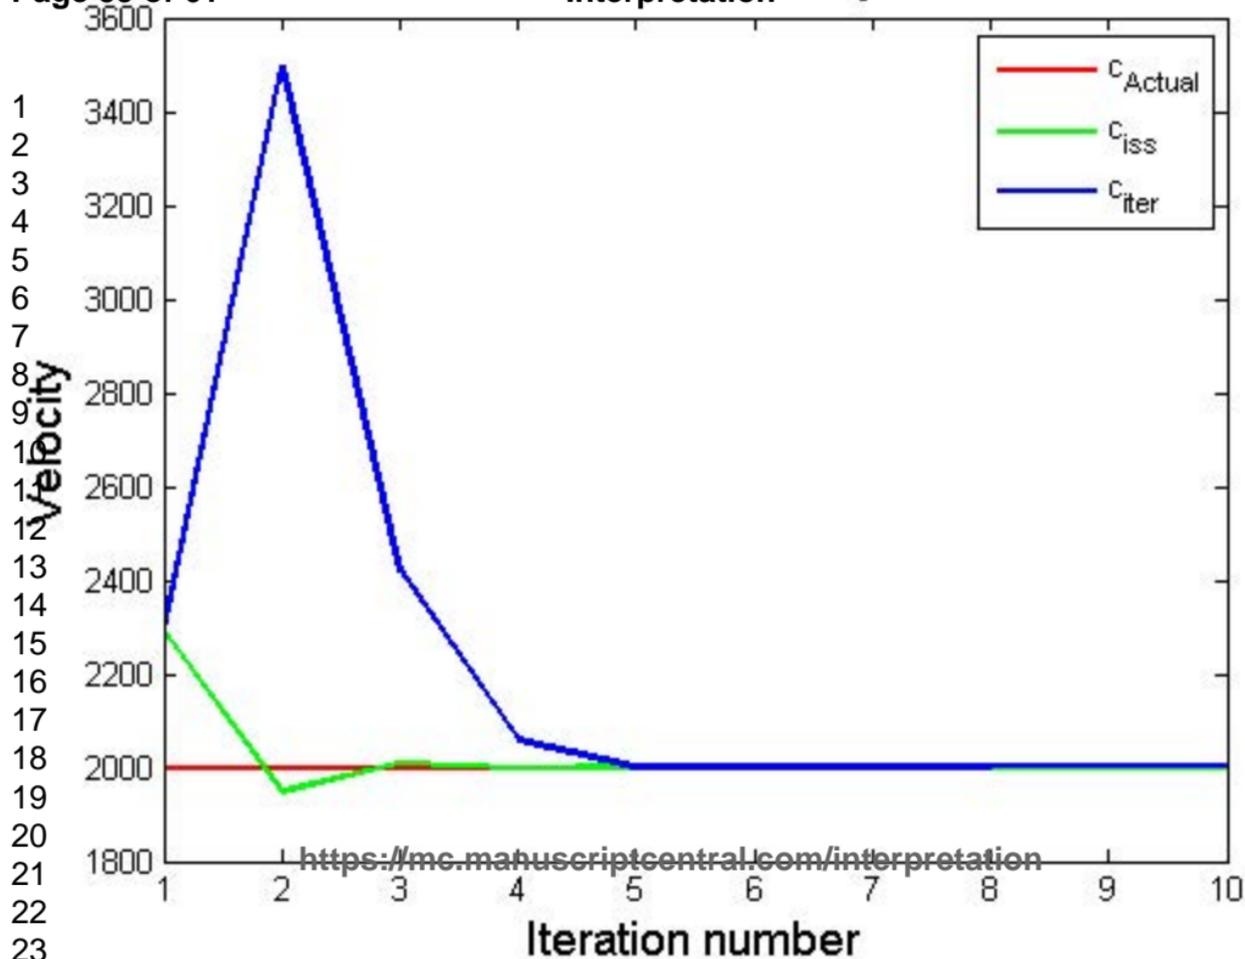


<https://mc.manuscriptcentral.com/interpretation>

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23

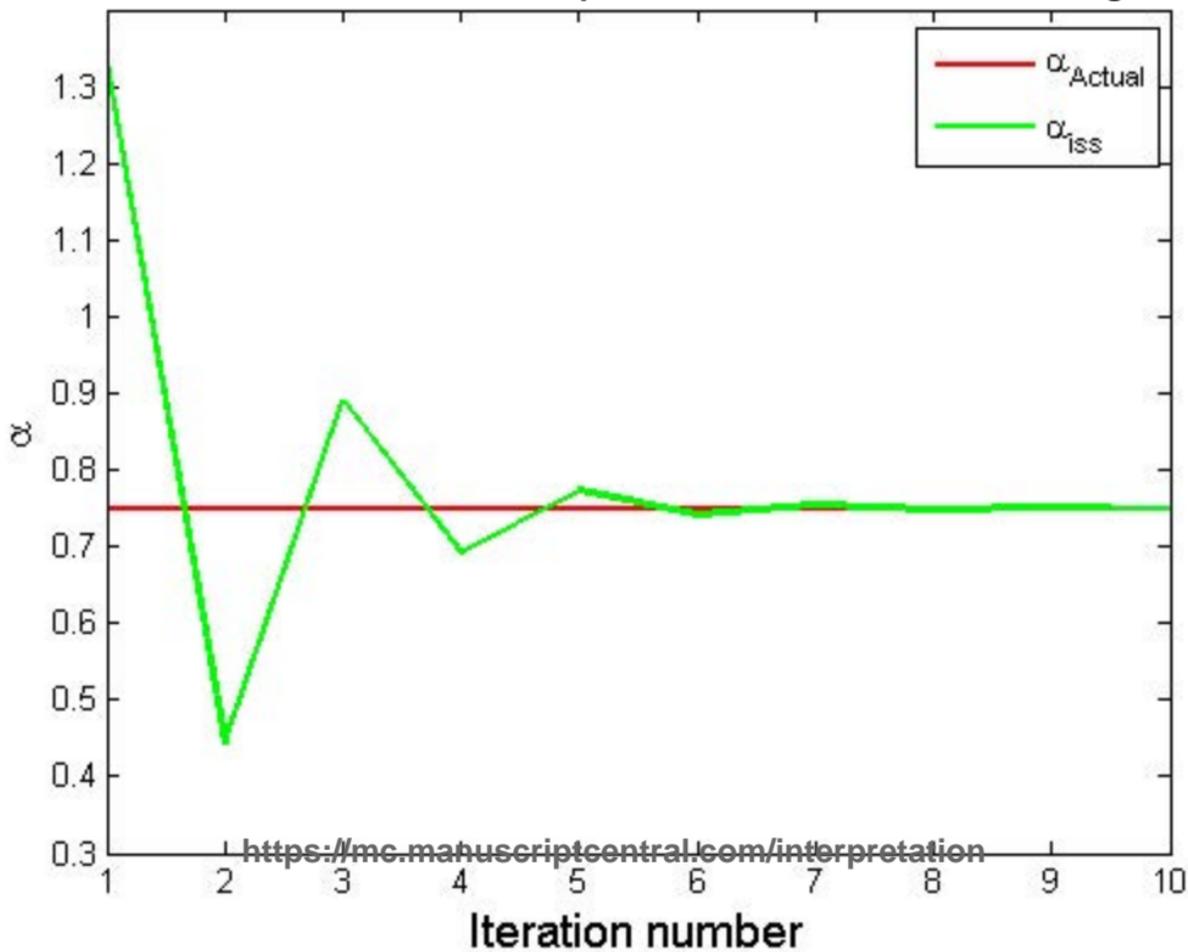

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22

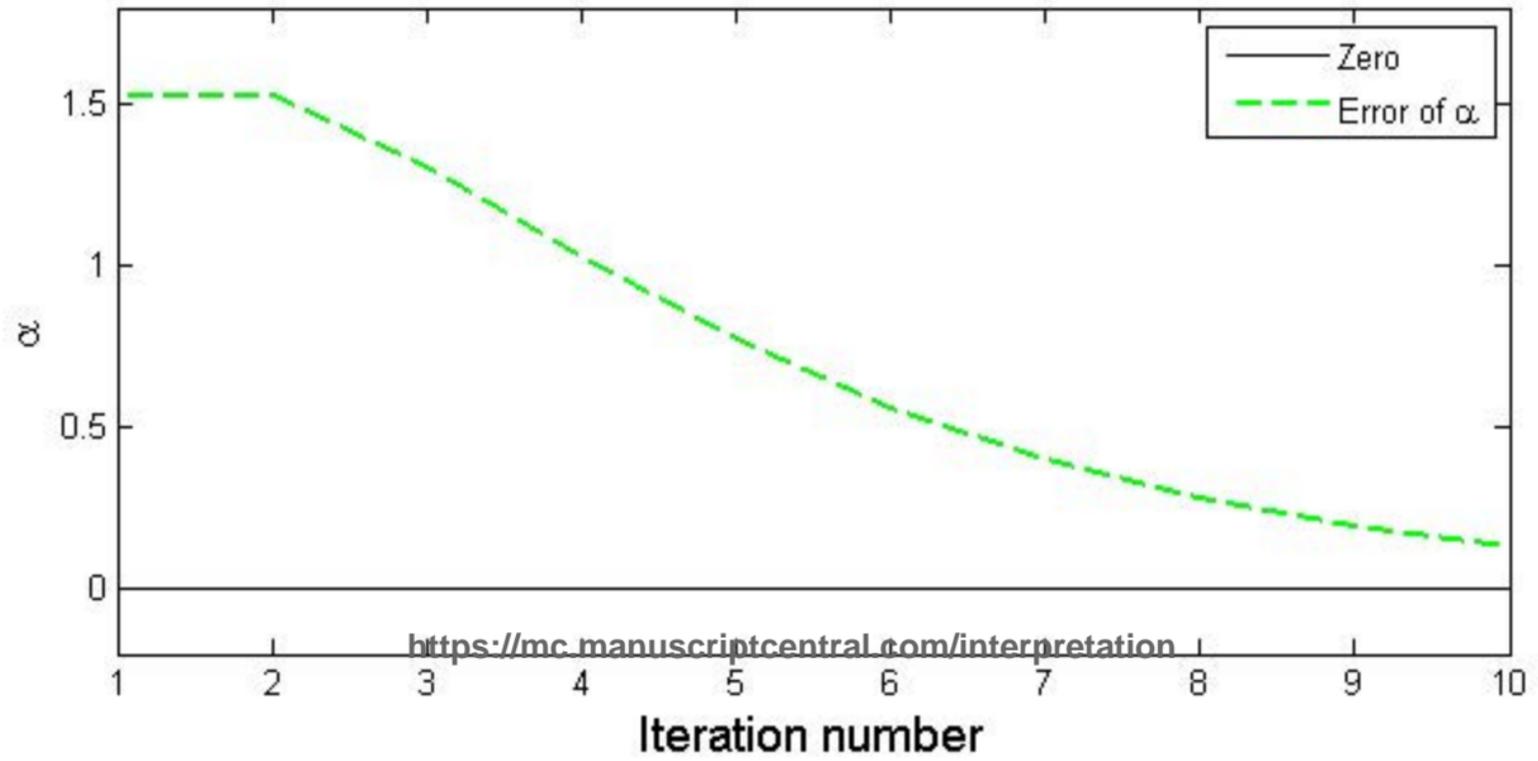

<https://mc.manuscriptcentral.com/interpretation>